

Numerical modeling of inextensible elastic ribbons with curvature-based elements

Raphaël Charrondière^a, Florence Bertails-Descoubes^a, Sébastien Neukirch^b,
Victor Romero^{a,b}

^a*Univ. Grenoble Alpes, CNRS, Inria, Grenoble INP, LJK, Grenoble, France*

^b*Sorbonne Université, CNRS, UMR 7190, Institut Jean le Rond d'Alembert, Paris, France*

Abstract

We propose a robust and efficient numerical model to compute stable equilibrium configurations of clamped elastic ribbons featuring arbitrarily curved natural shapes. Our spatial discretization scheme relies on elements characterized by a linear normal curvature and a quadratic geodesic torsion with respect to arc length. Such a high-order discretization allows for a great diversity of kinematic representations, while guaranteeing the surface of the ribbon to remain perfectly inextensible. Stable equilibria are calculated by minimizing the sum of the gravitational and elastic energies of the ribbon, under a developability constraint. Our algorithm compares favorably to standard shooting and collocation methods, as well as to experiments. Our model furthermore shows significant differences in behavior compared to a rod model, while yielding a substantial speed-up compared to a more general shell model. These results confirm the benefit of designing a special numerical model dedicated to ribbons.

Keywords: Slender elastic structure, developable surface, curvature-based elements, constraint-based nonlinear optimization

2010 MSC: 00-01, 99-00

1. Introduction

From cable plies and fashion accessories to hair ringlets, flexible band-shaped structures, namely *ribbons*, are widely present in our daily environment. While the mechanical study of ribbons was initiated in the 1930s [1], there is recently a renewed interest in understanding and modeling such fascinating structures [2]. Formally, a ribbon-like structure lies between rod and plate models: its thickness remains negligible in comparison to its width, the latter being itself negligible in comparison to its length. Under clamped-free boundary conditions, it is reasonable to consider the ribbon as a developable surface [39, Sec. 6.7.1], that is, a surface that can be flattened onto a plane without any local distortion. What is more, this surface remains *inextensible*, meaning that it cannot be stretched nor sheared, but it deforms isometrically, by pure bending (in contrast to situations where wrinkles appear, see e.g. [3]). We assume that this surface is always

Email addresses: raphael.charrondiere@inria.fr (Raphaël Charrondière),
florence.descoubes@inria.fr (Florence Bertails-Descoubes)

smooth, that is, at least twice differentiable. In this paper, we further limit
 15 ourselves to the case of a rectangular ribbon geometry with a fixed thickness,
 composed of an isotropic and linear elastic material, see Fig. 1.

Developability implies that whatever the state of the ribbon, its surface is
ruled, i.e. it is the union of infinitely thin segments called rulings. Note that
 these rulings do not correspond to material lines of the ribbon, but only to
 20 geometric lines which continuously evolve during deformation. The presence
 of rulings is an important feature of the ribbon surface and was discussed in
 connection with the shape of the Möbius strip soon after its introduction, see
 e.g. [4, 5, 6]. Computing the equilibrium shape of the Möbius strip is partly
 responsible for the recent interest in elastic ribbon equations, see for example
 25 [7, 8] where equilibrium equations are written in their strong formulation and
 the boundary value problem is solved using the AUTO package [9]. Other re-
 cent works include [10] who show that ribbon equations can be written in a
 form similar to the Kirchhoff equations for elastic rods, albeit yielding different
 behaviors under the same loading [11, 12, 13].

While the number of numerical models for elastic rods has exploded from
 30 the 80s to recent years, see e.g. [14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24], to our
 knowledge very few computer codes have been designed specifically for ribbons.
 An exception is the dynamic ribbon simulator proposed in [25, 26], which relies
 on a nodal discretization of the ribbon surface. This model requires a number
 35 of elements that increases as the surface is getting curved, making its use inef-
 ficient in the case of strongly curled ribbons. In addition, inextensibility of the
 ribbon is taken into account by means of additional constraints, which are non-
 linear. Our approach relies on a radically different discretization scheme, where
 curvatures (instead of positions) are chosen as degrees of freedom. Compared
 40 to inextensible rod models, only two (instead of three) curvatures are sufficient
 to describe the actual degrees of freedom of a ribbon, due to the developability
 constraint. Our final choice for a reduced set of curvatures allows us to cap-
 ture precisely the geometry of the ribbon for arbitrary natural curvatures, while
 guaranteeing the developability and inextensibility of the ribbon in an exact and
 45 automated manner.

Contribution. Our approach is based on the theoretical
 Wunderlich ribbon model presented in [10], which
 we briefly recall in section 2. We numerically compute
 stable equilibrium solutions of ribbons, drawing inspi-
 50 ration from the curvature-based models developed for
 inextensible elastic rods [18, 27].

In particular, we choose to use *material curvatures*
 of the ribbon as main variables of our system, making
 it easier to recover a smooth and inextensible ribbon
 55 centerline, regardless of the chosen resolution – which
 contrasts with classical nodal models. The developa-
 bility constraint is simply accounted for by reducing
 the number of variables to two scalar fields: one ma-
 terial curvature, and one variable accounting for the
 60 direction of the rulings. A difficulty, however, is to re-
 construct the geometry of the ribbon accurately from
 this reduced set of degrees of freedom. Inspired by

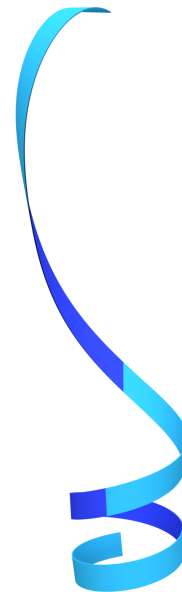


Figure 1: Stable equilibrium
 of a curled ribbon made of 5
 elements, computed in 0.55
 seconds with our method.

the super-clothoid rod model [27], we use power series for the integration of the ribbon centerline from curvatures, while keeping a fine control on the numerical error (section 3). Thanks to the ruling direction as a primary variable, the developable surface of the ribbon can then be constructed from the centerline with excellent accuracy. A last difficulty consists in ensuring the non-crossing of the rulings during the deformation of the ribbon, so as to guarantee that the ribbon surface remains smooth. We treat this condition as an inequality constraint in our energy minimization problem. We analytically compute the first and second derivatives of our discrete ribbon energy and use an interior point minimization method relying on the energy Hessian [28]. Numerical solutions are then found in a few seconds on a standard machine (see inset figure), and this for a wide range of parameters (section 4). Finally, we show that our code compares favorably to standard shooting and collocation methods, and to experiments. Furthermore, our results highlight significant differences compared to equilibria generated by a rod model, as well as a substantial speed-up compared to a more general shell model, which confirms the benefit of designing numerical models dedicated to ribbons (section 5).

2. Wunderlich ribbon parameterized by curvatures

The ribbon model of Sadowsky [1, 29] defines a one dimensional potential energy, derived for the case $h \ll w \ll L$, with h the thickness, w the width, and L the length of the ribbon. It enforces a developable mid-surface, as opposed to elastic rods models. Our approach relies on the Wunderlich ribbon model [6], as described in [10], which is a generalization of the Sadowsky model when w becomes of the same order as L . In the following we show how to exploit this 1D ribbon energy, without using existing auto-differentiation tools, to reach a desired and controlled precision at a minimal cost.

Notation. Scalars will be denoted with plain small letters, vectors of \mathbb{R}^3 by bold small letters, and matrices of the rotation group \mathcal{SO}_3 by slant capital letters. For instance, we shall write $v \in \mathbb{R}$, $\mathbf{a} \in \mathbb{R}^3$, and $\mathcal{R} \in \mathcal{SO}_3$. Scalar product between two vectors \mathbf{u} and \mathbf{v} of \mathbb{R}^3 will be denoted by $\mathbf{u} \cdot \mathbf{v}$. We further define $[\cdot]_{\times} : \mathbb{R}^3 \rightarrow \mathcal{A}_3$ as the linear operator transforming the vector product into a matrix multiplication $u \times v = [u]_{\times} v$, with \mathcal{A}_3 the set of real asymmetric matrices of size 3 by 3. Finally, $x'(s) = \frac{dx}{ds}$ will denote the spatial derivative of the function $x(s)$.

2.1. Base geometric parameterization

We consider a rectangular ribbon with constant thickness h . Let $\mathbf{r} : [0, L] \rightarrow \mathbb{R}^3$ be the centerline of the ribbon, parameterized by the arc length $s \in [0, L]$, with L the total length of the ribbon. The material (Cosserat) frame $\mathcal{R} : [0, L] \rightarrow \mathcal{SO}_3$ describes the surface locally around the centerline. For each point $\mathbf{r}(s)$, we denote by $\mathbf{d}_1(s)$, $\mathbf{d}_2(s)$, and $\mathbf{d}_3(s)$ the column vectors of the rotation matrix $\mathcal{R}(s)$. Geometrically, the component $\mathbf{d}_3(s)$ stands for the unitary vector tangent to the centerline at s , $\mathbf{d}_2(s)$ for the unitary surface normal, while $\mathbf{d}_1(s) = \mathbf{d}_2(s) \times \mathbf{d}_3(s)$ is imposed by the \mathcal{SO}_3 structure. Figure 2 illustrates the geometric configuration of a ribbon.

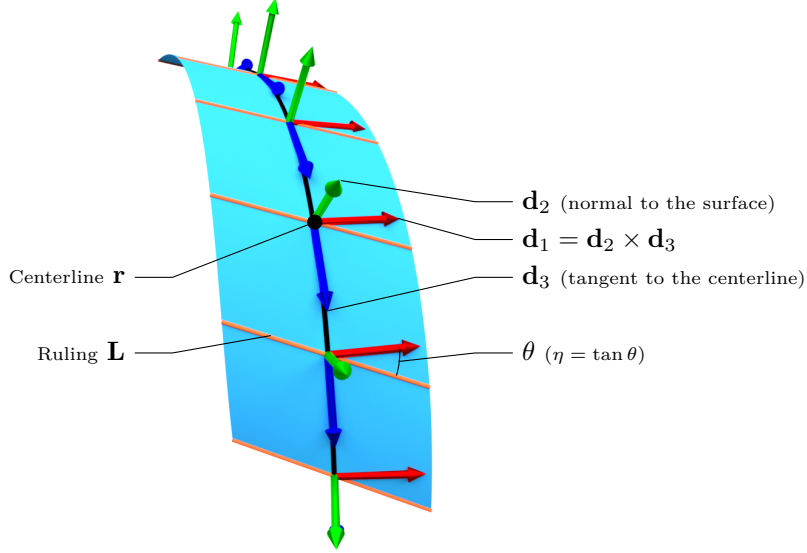


Figure 2: Base parameterization of a ribbon consisting of the centerline \mathbf{r} , the Cosserat material frame \mathcal{R} , and the scalar field $\eta = \tan \theta$.

Ruled surface. As mentioned earlier, the surface of the ribbon is ruled, meaning that at each point $\mathbf{r}(s)$ of the centerline passes a straight segment – called a ruling, and denoted by $\mathbf{L}(s)$ – which connects the two boundaries of the ribbon in the transverse direction while lying on its surface (orange segment in figure 2). As $\mathbf{d}_2(s)$ is normal to the ribbon surface at s , the direction $\mathbf{q}(s)$ of the ruling going through $\mathbf{r}(s)$, called the generatrix, must belong to the plane $(\mathbf{d}_1(s), \mathbf{d}_3(s))$. The angle between the ruling and $\mathbf{d}_1(s)$ is $\theta(s)$, and we use the scalar field $\eta = \tan \theta$ (with $\eta : [0, L] \rightarrow \mathbb{R}$) to obtain a simple parameterization of the generatrix as

$$\mathbf{q}(s) = \mathbf{d}_1(s) + \eta(s)\mathbf{d}_3(s). \quad (1)$$

Note that $\mathbf{q}(s)$ is not normed in general, its norm being $\sqrt{1 + \eta^2(s)}$. From the generatrix, the ruling then reads $\mathbf{L}(s) = \{\mathbf{r}(s) + v\mathbf{q}(s); v \in \mathcal{S}(s)\}$, where the interval $\mathcal{S}(s) \in \mathbb{R}$ is specified in the following. Finally, the surface of the ribbon, representing the set of all rulings, is given by the function

$$\begin{aligned} \phi &: [0, L] \times \mathcal{S} \rightarrow \mathbb{R}^3 \\ (s, v) &\mapsto \mathbf{r}(s) + v \underbrace{[\mathbf{d}_1(s) + \eta(s)\mathbf{d}_3(s)]}_{\mathbf{q}(s)}. \end{aligned} \quad (2)$$

In the present case of a rectangular ribbon, the set $\mathcal{S}(s)$ boils down to a constant interval. Indeed, consider a deformed ribbon with its ruling $\mathbf{L}(s) = \{\mathbf{r}(s) + v[\mathbf{d}_1(s) + \eta(s)\mathbf{d}_3(s)]; v \in \mathcal{S}(s)\}$. The interval $\mathcal{S}(s)$ is actually easier to evaluate on a flat configuration, so we deform the ribbon *isometrically* until it becomes flat, and we denote variables in the flat configuration with bars. Here consider the deformation of the initial ruling $\bar{\mathbf{L}}(s)$, which reads $\bar{\mathbf{L}}(s) = \{\bar{\mathbf{r}}(s) +$

$v[\bar{\mathbf{d}}_1(s) + \eta(s)\bar{\mathbf{d}}_3(s)]; v \in \mathcal{S}(s)\}$. Note that in this expression, only the material frame has changed compared to the deformed configuration. All distances and angles are preserved, so the ruling orientation $\eta(s)$ and v are kept the same, and as a result the interval $\mathcal{S}(s)$ is invariant through the isometric flattening operation. We show in figure 3-left, the ruling on the flat configuration. At the edge point $\bar{\mathbf{r}}_+(s) = \bar{\boldsymbol{\phi}}(s, \frac{w}{2})$ we have $v = \frac{w}{2}$, so we deduce $\mathcal{S} = [-\frac{w}{2}, \frac{w}{2}]$, which is independent of s .

The reader can remark that rulings are not material lines: when the ribbon deforms, the set of material points forming the rulings changes. Moreover $\bar{\mathbf{L}}(s)$ denotes a valid set of rules for the flat configuration, and they might not be parallel.

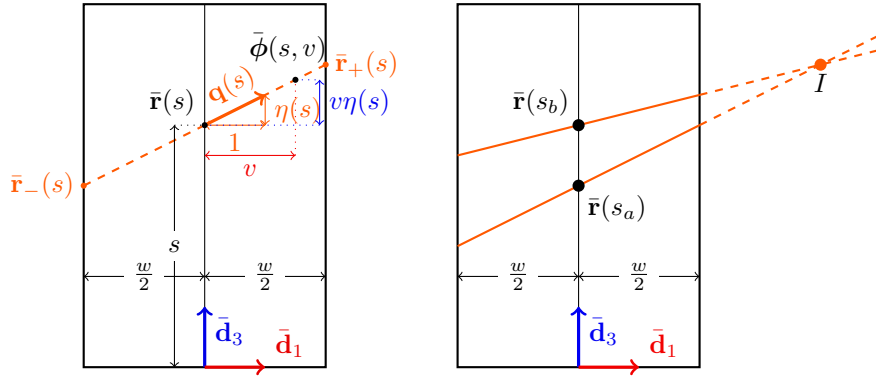


Figure 3: On the left, parameterization of the ribbon with s , v and η , on the flatten configuration. On the right, illustration of a singular point. Rulings passing at the points of arc lengths s_a and s_b are drawn in orange. The surface of the ribbon being developable and smooth, rulings are not allowed to intersect inside the ribbon.

Wunderlich (or smoothness) constraint. As illustrated in figure 3-right, the rulings of a smooth developable surface cannot intersect inside the surface. To be convinced, the reader can make a simple experiment: take a paper sheet, bend the edges to form a cone, and try to get the top of the cone (singularity point) inside the sheet; unless you crease or rip the sheet, this is impossible.

This non-intersection constraint can be expressed globally on the flat configuration as

$$\forall s_a, s_b \in [0, L], s_a \neq s_b, \quad \forall v_a, v_b \in S, \quad \bar{\boldsymbol{\phi}}(s_a, v_a) \neq \bar{\boldsymbol{\phi}}(s_b, v_b),$$

or, say otherwise, the point I lying at the intersection of two rulings passing through s_a and s_b , if it exists (non-parallel rulings), should lie outside the ribbon surface (see figure 3-right). By noticing that in the flat configuration, the material frame $\{\bar{\mathbf{d}}_1, \bar{\mathbf{d}}_2, \bar{\mathbf{d}}_3\}$ is uniform, and using expression (2), one realizes that intersection can only happen if $v_a = v_b$. Furthermore, the global constraint expressed above is equivalent to a local constraint where s_a and s_b are infinitely close, that is, for $s_b = s_a + ds$. Expanding $\bar{\boldsymbol{\phi}}(s_a + ds, v_a)$ at the first order, the intersection condition reads $\frac{\partial \bar{\boldsymbol{\phi}}}{\partial s}(s_a, v_a) = 0$, which yields $1 + v_a \eta'(s) = 0$. The condition for point I to lie outside the ribbon, $|v_a| > w/2$, then reads

$$\forall s \in [0, L] \quad |\eta'(s)| < \frac{2}{w}, \quad (3)$$

which also encompasses the case when rulings are parallel ($\eta'(s) = 0$).

2.2. Curvature-based parameterization

155 Like for curvature-based rod models [18, 27], our idea is to use the material curvatures of the ribbon as main variables of our ribbon model, instead of taking the base geometric variables $(\mathbf{r}, \mathcal{R}, \eta)$. This choice allows us to better stick to the actual degrees of freedom of the ribbon, and in particular, to capture the inextensibility of the centerline intrinsically. Like for rods, we first need to relate
160 material curvatures to the geometry $(\mathbf{r}, \mathcal{R}, \eta)$ of the ribbon. In contrast to rods however, we also need to reduce the set of curvatures in order to account for the inextensibility and developability of the ribbon surface.

From curvatures to the centerline. Inextensibility of the centerline reads $\mathbf{r}'(s) = \mathbf{d}_3(s)$, which integrates to $\mathbf{r}(s) = \mathbf{r}(0) + \int_{t=0}^s \mathbf{d}_3(t)dt$. Besides, the SO_3 structure
165 implies the existence of a vector $\boldsymbol{\Omega}(s) \in \mathbb{R}^3$ such that $\mathcal{R}'(s) = [\boldsymbol{\Omega}(s)]_{\times} \mathcal{R}$. The vector $\boldsymbol{\Omega}(s)$ is called the Darboux vector, and reads $\boldsymbol{\Omega}(s) = \kappa_1(s)\mathbf{d}_1(s) + \kappa_2(s)\mathbf{d}_2(s) + \kappa_3(s)\mathbf{d}_3(s)$ where $\kappa_1(s)$, $\kappa_2(s)$, and $\kappa_3(s)$ are respectively the normal curvature, the geodesic curvature and the geodesic torsion of the ribbon at arc length s — here we simply refer to these quantities as material curvatures, or just
170 curvatures. It is convenient to manipulate curvatures directly by transforming the relation into $\mathcal{R}'(s) = \mathcal{R}(s) [\boldsymbol{\kappa}(s)]_{\times}$, where we have introduced the curvature vector $\boldsymbol{\kappa}(s) = (\kappa_1(s), \kappa_2(s), \kappa_3(s))^T$, such that $\boldsymbol{\Omega}(s) = \mathcal{R}(s)\boldsymbol{\kappa}(s)$.

Once the curvature vector field $\boldsymbol{\kappa}(s)$ and the initial conditions $(\mathbf{r}(0), \mathcal{R}(0)) = (\mathbf{r}_0, \mathcal{R}_0)$ are given, we obtain a Cauchy integration problem for $(\mathcal{R}, \mathbf{r})$, called the
175 *Darboux problem*,

$$\mathcal{P} = \begin{cases} (\mathbf{r}(0), \mathcal{R}(0)) = (\mathbf{r}_0, \mathcal{R}_0) \\ \mathcal{R}'(s) = \mathcal{R}(s) [\boldsymbol{\kappa}(s)]_{\times} \\ \mathbf{r}'(s) = \mathcal{R}(s) \mathbf{e}_z. \end{cases} \quad (4)$$

Here $\mathbf{e}_z = (0, 0, 1)^T$ stands for the third vector of the canonical basis, allowing us to select the third vector of the material frame, as $\mathbf{d}_3(s) = \mathcal{R}(s) \mathbf{e}_z$. The Darboux problem (4) possesses a unique solution. However it is a linear non-autonomous differential system and apart from specific cases, the solution has
180 no closed-form expression in the general case¹, i.e. it cannot be represented with a finite number of elementary operations. Nevertheless, when the curvature is a polynomial function of s , it can be shown that the solution is analytic², that is, it can be expressed as a convergent power series [27]. In section 3.1, we show how to adapt the power series integration method developed in the case
185 of rods [27] to the present case of ribbons.

¹In particular, due to the non-commutativity of $SO(3)$, taking the exponential of the primitive of the curvature matrix does not work here as it works for autonomous linear systems of ODEs, see e.g. [30, 31, 32].

²The term *analytic* is more inclusive compared to a *closed-form* expression as it encompasses infinite sets of elementary operations. In this paper, we further misuse the term analytic to characterize a computational method which relies on a truncated power series where the sum of truncated terms is numerically negligible: machine precision is reached while omitting these terms.

Isometry of the surface. Geometrically, a major difference between rods and ribbons is that ribbons are characterized by additional constraints: their surface should deform isometrically from a planar configuration, and thus remain inextensible and developable. In the following we simply provide a synthesis of these conditions, and refer the reader to [10] for mathematical justifications.

On the one hand, inextensibility of the ribbon surface imposes the invariance of the geodesic curvature. Since $\kappa_2 = \mathbf{d}'_3 \cdot \mathbf{d}_1$, this implies $\kappa_2 = \bar{\mathbf{d}}'_3 \cdot \bar{\mathbf{d}}_1$, which in the case of a rectangular ribbon boils down to

$$\kappa_2 = 0. \quad (5)$$

On the other hand, developability implies a zero Gaussian curvature for the surface, which can be written as

$$\kappa_3 = \eta \kappa_1. \quad (6)$$

Reduced degrees of freedom. Given the additional constraints above, we propose in our model to use η and κ_1 as degrees of freedom. This choice allows us, via equations (5) and (6), to compute $\boldsymbol{\kappa}(s) = (\kappa_1, 0, \eta \kappa_1)^T$ for all values of η and κ_1 . Note that choosing κ_1 and κ_3 instead would cause numerical difficulties for computing η as κ_1 vanishes (likewise for the choice of η and κ_3).

2.3. Energies

We consider a naturally curved elastic ribbon clamped under gravity. We do not take into account contact of the ribbon with another object, nor self-contact.

Elastic energy. According to [10, Sec. 6.1], the Wunderlich elastic energy of a rectangular ribbon with natural normal curvature κ_N reads

$$E_W = \frac{Dw}{2} \int_0^L \left[\kappa_1^2 (1 + \eta^2)^2 \frac{1}{w\eta'} \ln \left(\frac{1 + \frac{\eta'w}{2}}{1 - \frac{\eta'w}{2}} \right) - 2\kappa_N \kappa_1 (1 + \nu\eta^2) \right] ds, \quad (7)$$

where ν is the Poisson's ratio, Y the Young's modulus, and $D = \frac{Yh^3}{12(1-\nu^2)}$ the bending modulus of the surface. In the limit $\eta'w \rightarrow 0$, the Wunderlich energy E_W boils down to the so-called Sadowsky energy,

$$E_S = \frac{Dw}{2} \int_0^L \kappa_1^2 (1 + \eta^2)^2 - 2\kappa_N \kappa_1 (1 + \nu\eta^2) ds. \quad (8)$$

Gravitational energy. We define the potential gravitational energy in a standard way as

$$E_G = - \int_0^L \int_{-\frac{w}{2}}^{\frac{w}{2}} \rho h \boldsymbol{\phi}(s, v) \cdot \mathbf{g} da(s, v), \quad (9)$$

where ρ is the material density, h the thickness of the ribbon, \mathbf{g} the gravitational acceleration, and $da(s, v) = (1 + v\eta'(s))dvds$ the area of the infinitesimal (trapezoidal) integration element. Integrating (9) along v yields

$$E_G = - \int_0^L \rho h w \left(\mathbf{r}(s) + \frac{\eta'(s)w^2}{12} \mathbf{q}(s) \right) \cdot \mathbf{g} ds. \quad (10)$$

The length of the ribbon being much greater than its width, we consider in the following that the term $\frac{\eta'(s)w^2}{12} \mathbf{q}(s)$ is negligible, and omit it in our computations for the sake of simplicity (see section 3.2). In practice, we have not observed any discrepancy related to this approximation.

215 *Remarks.* Our goal in the following is to compute stable configurations of the
 ribbon, that is, local minima of its total mechanical energy. Before discretizing
 our set of equations as done in next section, we can already anticipate some
 difficulties. First, the non-convexity of the energy appears as a major pitfall for
 standard optimization techniques (such as Newton). Another challenge arises
 220 from the logarithmic term in the Wunderlich energy, which diverges when the
 constraint (3) becomes active. On the one hand, we shall take this constraint
 into account while minimizing energy, and on the other hand we shall build
 a limit case for the Wunderlich energy when the constraint is active. In sec-
 tions 3.2 and 4.1, we present a solving method able to handle all these issues in
 225 a robust and efficient way.

3. Discretization

To tackle our energy minimization problem numerically, we adopt a Galerkin-
 like discretization strategy. The ribbon is cut in p (trapezoidal and curved)
 elements, each element being described by a linear normal curvature and a
 230 quadratic geodesic torsion. We first explain how this discrete scheme, combined
 with a robust power series summation algorithm, leads to a consistent and ac-
 curate approximation of the ribbon kinematics. Then we show how it can be
 extended to compute accurately the mechanical energy as well as its first and
 second derivatives.

3.1. Discrete kinematics

235 We cut the centerline in p segments $\mathbf{S}^i = \{\mathbf{r}(s), s \in [s^i, s^{i+1}]\}$ of length
 $s^{i+1} - s^i = \ell^i$, with $i \in \{0, \dots, p-1\}$. In the transverse direction, the two
 boundaries of each ribbon *element* \mathbf{E}^i are determined by the rulings passing
 through $\mathbf{r}(s^i)$ and $\mathbf{r}(s^{i+1})$, respectively. Each element \mathbf{E}^i thus takes the form of
 240 a trapezoid on the flat configuration (see figure 4-left).

Linear and quadratic form functions. Our goal is to approximate our primary
 variables η and κ_1 by basis functions parameterized by a finite number of degrees
 of freedom. The simplest choice, consisting in taking piecewise uniform functions
 as often done in the case of rod models [18, 33, 23, 24], is however inappropriate
 245 here as it leads to a discontinuous ribbon surface. Indeed, if the function η is
 discontinuous at element boundaries, then elements cannot even connect to
 each other properly (see figure 4-right). In order to guarantee a continuous
 and sufficiently smooth ribbon surface, we choose η and κ_1 as continuous and
 piecewise *linear* functions of s , i.e. $\forall s \in [s^i, s^{i+1}]$, $\kappa_1(s) = a^i s + b^i$ and $\eta(s) =$
 250 $c^i s + d^i$, with $a^i, b^i, c^i, d^i \in \mathbb{R}$. As a result, the geodesic torsion $\kappa_3 = \eta \kappa_1$
 takes the form of a piecewise *quadratic* function of s , i.e. $\forall s \in [s^i, s^{i+1}]$, $\kappa_3(s) =$
 $a^i c^i s^2 + (a^i d^i + b^i c^i) s + b^i d^i$. Finally, the curvature vector $\boldsymbol{\kappa}$ is a polynomial
 of degree 2 in s on each element,

$$\forall s \in [s^i, s^{i+1}], \quad \boldsymbol{\kappa}(s) = \boldsymbol{\lambda}_0^i + \boldsymbol{\lambda}_1^i s + \boldsymbol{\lambda}_2^i s^2 \quad (11)$$

with $\boldsymbol{\lambda}_0^i = (b^i, 0, b^i d^i)^T$, $\boldsymbol{\lambda}_1^i = (a^i, 0, a^i d^i + b^i c^i)^T$, and $\boldsymbol{\lambda}_2^i = (0, 0, a^i c^i)^T$.

255 Taking a polynomial curvature vector of degree ≥ 1 per element however
 implies that the Darboux problem (4) has no closed-form solution on the element
 (see section 2.2). The recourse to a numerical integration method therefore

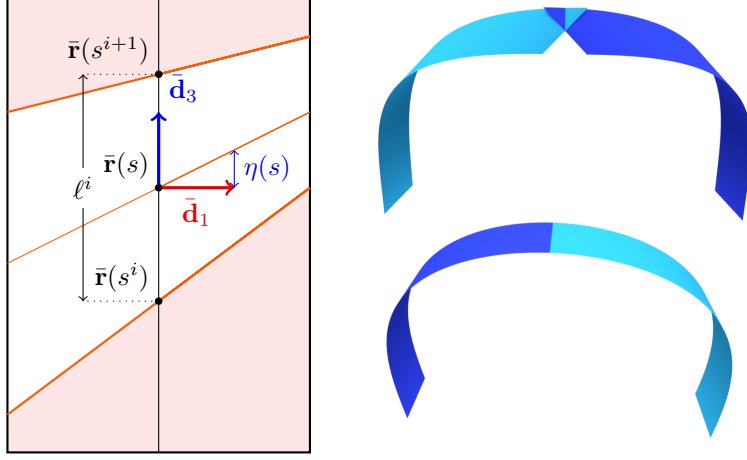


Figure 4: Left: a trapezoidal element (in white) shown on the flat configuration. Note that boundaries between the element and its neighbors coincide with rulings. Right: (top) Taking a constant curvature vector per element leads to discontinuous rulings, thus disconnected elements; (bottom) in contrast, a linear normal curvature and quadratic geodesic torsion per element ensures continuity of the rulings, and results in a smooth ribbon surface.

proves necessary, with the risk of turning this crucial kinematical step, which needs to be accurately resolved, into an overwhelming step. Fortunately, an analytic integration method, based on power series, has been deployed in [27]. We show that this method can be adapted to solve our ribbon kinematics in a both accurate and efficient way.

Numerical integration with power series. For the sake of clarity, in this section we consider a ribbon with a single element, parameterized by its arc length $s \in [0, L]$, and keep previous notation while omitting the subscript i . The extension to a chain of several elements is discussed in section 3.3.

The curvature vector $\boldsymbol{\kappa}$ being a polynomial, it is a convergent power series. Then, it can be shown that \mathbf{r} and \mathcal{R} are convergent power series too [27, Theorem 1]. Expanding $\mathbf{r}(s)$ and $\mathcal{R}(s)$ as power series $\mathbf{r}(s) = \sum_{n=0}^{+\infty} \mathbf{r}_n s^n$, $\mathcal{R}(s) = \sum_{n=0}^{+\infty} \mathcal{R}_n s^n$, we rewrite the Darboux problem (4) as

$$\begin{cases} \mathbf{r}(0) = \mathbf{r}_0, \mathcal{R}(0) = \mathcal{R}_0 \\ \sum_{n=1}^{+\infty} n \mathcal{R}_n s^{n-1} = \sum_{n=0}^{+\infty} \mathcal{R}_n s^n [\boldsymbol{\kappa}(s)]_{\times} \\ \sum_{n=1}^{+\infty} n \mathbf{r}_n s^{n-1} = \sum_{n=0}^{+\infty} \mathcal{R}_n s^n \mathbf{e}_z. \end{cases} \quad (12)$$

By uniqueness of the coefficients of a power series, and using the linearity of the operator $[\cdot]_{\times}$, solving problem (12) amounts to solving the following recurrences,

$$\begin{cases} \mathcal{R}_0 = \mathcal{R}_0 \\ \mathcal{R}_1 = \mathcal{R}_0 [\boldsymbol{\lambda}_0]_{\times} \\ \mathcal{R}_2 = \frac{1}{2} (\mathcal{R}_1 [\boldsymbol{\lambda}_0]_{\times} + \mathcal{R}_0 [\boldsymbol{\lambda}_1]_{\times}) \\ \forall n \geq 3, \mathcal{R}_n = \frac{1}{n} \left(\sum_{k=0}^2 \mathcal{R}_{n-1-k} [\boldsymbol{\lambda}_k]_{\times} \right) \\ \mathbf{r}_0 = \mathbf{r}_0 \\ \forall n > 0, \mathbf{r}_n = \frac{1}{n} \mathcal{R}_{n-1} \mathbf{e}_z. \end{cases} \quad (13)$$

One main difference with the rod model derived in [27] is the three-term (instead
 275 of a two-term) recurrence for the material frame \mathcal{R} . This order increase is
 due to our quadratic geodesic torsion, which itself stems from the Wunderlich
 constraint (3), inherent to ribbons. Such a difference justifies the need for
 revisiting the algorithm proposed in [27]. But still, both problems share many
 common features. First, due to the structure of the Darboux problem, the
 280 ribbon series (13), like the rod series, are characterized by a fast convergence
 of their remainder, and this, for a relatively low rank n [34]. In practice, it
 is therefore sufficient to consider less than a hundred terms for evaluating the
 series accurately. Second, if we naively sum the different terms of these series
 using floating-point arithmetic, we are quickly faced with a drastic precision
 285 loss. This problem is known as *catastrophic cancellation*, and has been carefully
 analyzed in [35]. For the sake of completeness, we recall the base lines of this
 issue in the following.

Catastrophic cancellation. Problems of precision loss appear when summing
 terms with very different orders of magnitude and opposite signs. In modern
 290 computers, a real number is represented by a mantissa m , an exponent n and
 a sign $s = \pm 1$. The value of the real is then $s \times 1, m \times 2^n$ where the comma
 is the same as the one that is used to write the decimal part of a number (ex-
 cept that it is written in binary format here). In double precision, the mantissa
 is of size 52 bits, allowing to represent numbers not larger than $2^{52} \approx 10^{16}$.
 295 Consequently, evaluating $1 + 10^{16}$ numerically yields 10^{16} , a phenomenon called
absorption. The problem is that if we now subtract 10^{16} from the initial sum,
 we find 0 instead of 1, which corresponds to a precision loss of 100 %! The series
 encountered in (13) includes terms of alternating signs (due to skew matrices),
 whose absolute value quickly reaches a very large value as the rank n increases,
 300 before becoming very small beyond a certain rank. As a result, all the ingredi-
 ents are present for catastrophic cancellation to arise when summing the terms
 of the series.

Error control through element subdivision. In [27], it is explained how to avoid
 catastrophic cancellation when integrating the Darboux problem using power
 series. A key observation is that numerical issues only occur when s is greater
 than a certain threshold. Hence the idea of subdividing the element into sub-
 elements, and to solve the Cauchy problem iteratively on each sub-element,
 starting from the end of the previous sub-element (shifting first point of the
 current sub-element to $s = 0$). If each sub-element is small enough, integration
 is guaranteed to be performed safely, i.e. without precision loss. The question
 is to estimate a suitable size for each sub-element. The idea is to derive a
 theoretical upper-bound s_{\max} for the length of a given sub-element, such that
 the terms of the series to be summed do not exceed in norm the maximal range
 covered by floating-point arithmetic. Said otherwise, if one wants a precision
 of $\epsilon = 2^{-m}$, one should make sure that the largest value of $\|\mathbf{R}_n s^n\|$ is bounded
 by 2^m . In his PhD thesis, Casati has derived an upper-bound for $\|\mathbf{R}_n s^n\|$ which
 is valid for any degree of the curvature polynomials [30],

$$\|\mathbf{R}_n s^n\| \leq e^{C(s)} \quad \text{with } C(s) = 2|s| \sum_{n=0}^{\deg} \|\boldsymbol{\lambda}_n s^n\|,$$

where \deg is the degree of the polynomials. We instantiate this upper-bound with $\deg = 2$ and find that $\|\mathbf{R}_n s^n\| \leq 2^m$ if $C(s) \leq m \frac{\ln 2}{2}$. In double precision (305) ($m = 52$), this gives us $s_{max} = \frac{m}{\sum_{n=0}^2 \|\boldsymbol{\lambda}_n\|_{\max}} \frac{\ln 2}{2}$, assuming $s_{max} \leq 1$ and $s_{max} = \sqrt[3]{\frac{m}{\sum_{n=0}^2 \|\boldsymbol{\lambda}_n\|_{\max}} \frac{\ln 2}{2}}$ otherwise. Consequently, the more the ribbon is curled, the more sub-elements are needed to preserve accuracy.

3.2. Discrete mechanical energy

We now have to compute the total potential energy corresponding to our (310) discrete ribbon kinematics. As before, we focus here on a ribbon made of a single element, before generalizing in section 3.3. Recall that on each element of the ribbon, η and κ_1 are polynomials of degree 1 in s , $\kappa_1(s) = as + b$ and $\eta(s) = cs + d$.

Discrete Wunderlich energy. By deriving the expressions given in section 2, the (315) elastic Wunderlich energy (7) becomes

$$E_W = \frac{Dw}{2} [T(c)P(a, b, c, d) - Q(a, b, c, d)] \quad (14a)$$

$$\text{with } T(c) = \frac{1}{cw} \ln \left(\frac{1 + \frac{cw}{2}}{1 - \frac{cw}{2}} \right), \quad (14b)$$

$$P(a, b, c, d) = \int_0^\ell (as + b)^2 [1 + (cs + d)^2] ds, \quad (14c)$$

$$Q(a, b, c, d) = \int_0^\ell 2\kappa_N(as + b) (1 + (cs + d)^2) ds. \quad (14d)$$

The only difficulty here is the computation of T which is not defined if $c = \pm \frac{2}{w}$. Note that in theory, the smoothness constraint (3) should prevent us from reaching these bounds. In practice, we have however observed that when getting close to the bounds, numerical problems arise. In such cases, we instead (320) use Taylor's expansion formula $T(c) = 1 + \frac{1}{3} \left(\frac{cw}{2} \right)^2 + o(c^3)$. We switch to this formula as soon as $\left| \frac{cw}{2} \right| < \epsilon_T$, where ϵ_T is an empirical threshold value. In practice, we have found that choosing $\epsilon_T = 10^{-5}$ leads to satisfactory results in double precision.

Discrete gravitational energy. As mentioned earlier, the length of the ribbon (325) being much greater than its width, we approximate the potential energy of gravity (9) by concentrating the mass on the centerline, $E_G \simeq - \int_0^L w \rho h \mathbf{r}(s) \cdot \mathbf{g} ds$. This integral can be computed from the power series $E_G = - \left(\sum_{k=0}^{+\infty} \mathbf{E}_k s^k \right) \cdot \mathbf{g}$, with

$$\begin{cases} \mathbf{E}_0 = 0 \\ \mathbf{E}_1 = w \mathbf{r}_0 \\ \forall k > 0, \mathbf{E}_{k+1} = \frac{1}{k+1} w \mathbf{r}_k. \end{cases} \quad (15)$$

3.3. Composition of the pieces

330 We now consider the general case of a chain of p elements. Recall that for accuracy purpose, each element itself is subdivided in sub-elements. In previous section we have defined, for each sub-element, four ready-to-use functions $\mathcal{R}(\mathcal{R}_0, a, b, c, d)$, $\mathbf{r}(\mathcal{R}_0, \mathbf{r}_0, a, b, c, d)$, $E_{\mathcal{G}}(\mathcal{R}_0, \mathbf{r}_0, a, b, c, d)$ and $E_{\mathcal{W}}(a, b, c, d)$. The parameters \mathcal{R}_0 , \mathbf{r}_0 , b , d all depend on previous sub-elements. This dependency
335 complexifies the derivation of the energy, as the functions are composed as many times as there are sub-elements.

To connect the elements into a single ribbon, we either need to express each element as a function of the previous elements, or we can connect each element to its previous element using a nonlinear constraint. To avoid any accuracy loss
340 due to the linearization of such a constraint, we choose the first option (meaning that (3) is the only constraint in our problem).

To retrieve a smooth surface at connections between two elements, it is sufficient to enforce curvature continuity. Recall that for each element \mathbf{E}_i , we have $\kappa_1(s^i) = a^i s^i + b_{\text{loc}}^i$ and $\eta(s^i) = c^i s^i + d_{\text{loc}}^i$, with s^i a local abscissa equal to 0 at the first end of the element, it imposes a shift of the variables $b_{\text{loc}}^i = b^i + \sum_{n=0}^{i-1} a^n \ell^n$ and $d_{\text{loc}}^i = d^i + \sum_{n=0}^{i-1} c^n \ell^n$. Continuity conditions thus read

$$\forall i > 0, b_{\text{loc}}^i = a^{i-1} \ell^i + b_{\text{loc}}^{i-1} \quad (16a)$$

$$d_{\text{loc}}^i = c^{i-1} \ell^i + d_{\text{loc}}^{i-1}, \quad (16b)$$

hence the full system is parameterized by $(b^0, d^0, a^0, c^0, a^1, c^1, \dots, a^{p-1}, c^{p-1})$.

When the energy is differentiated, like for sub-elements, composition between elements should be taken into account, leading to some numerical complexity: typically, the computation of the Hessian of the system is cubic in the
345 number of elements. Fortunately, the number of elements remains low (around 20). Because of the nature of the system, the numerical implementation is long and error-prone. During implementation, we have carefully checked analytic differentiation using comparisons with finite differences.

350 Despite these challenges, we show in the following that computing the energy, its gradient and Hessian analytically was worth it: this proved to be crucial in the success of our overall method for computing the statics of a ribbon.

4. Computing stable equilibria of ribbons

4.1. Robust energy minimization

355 Because of non-convexity and variable bounds, our minimization problem is particularly challenging. We have tried many minimization algorithms before being able to solve it in a robust way. We eventually rely on the open-source library IPOPT [28], an interior-point method which, in addition to regularization and line-searching, handles equality and inequality constraints. We feed this algorithm with both the gradient and the Hessian of the ribbon energy, calculated
360 in an analytic way. This algorithm proves to work well in a large number of scenarios and outperforms other minimization strategies when considering the following criteria: it never diverges, and is the fastest (see table 2).

365 To better understand the role played by the algorithm with respect to our problem, we have conducted a number of comparison experiments with various minimization methods, as reported below. These comparisons allowed us to

draw some conclusions on the key ingredients that are necessary for a successful computation of equilibria of our ribbon model,

- Use a *second-order* approach. We have always observed poor convergence for methods that do not exploit the information of the exact Hessian;
- Use *regularization* to deal with a non-positive Hessian robustly;
- Use *line-searching* to improve convergence;
- Finally, perform minimization on a *dimensionless* problem. On second-order minimization strategies, we have observed a speed gain between $\times 3$ and $\times 10$, meaning that non-dimensionalization greatly improves the conditioning of the linear system to be solved.

In the following we present and compare various standard minimization methods to justify our final selection of IPOPT.

4.2. Evaluation of various minimization methods

Many algorithms exist to minimize a function. We have compared our final choice, named IPOPT-HESS, against five standard methods that we remind to the reader below. All these methods correspond to an instance of the generic minimization algorithm provided in Algorithm 1. For a more comprehensive survey and analysis of minimization algorithms, we refer the reader to [36].

```

Input:  $E$  energy function,  $\mathbf{x}$  starting point
while convergence criterion not reached do
     $\mathcal{A} \leftarrow \text{sysMat}(E, \mathbf{x});$ 
     $\mathbf{d} \leftarrow \text{solve}_{\mathcal{A}}\{\mathcal{A} \cdot \mathbf{d} = -\nabla E(x)\}$  // Descent direction ;
     $\alpha \leftarrow \text{stepSize}(E, x, \mathbf{d})$  // Step ;
     $\mathbf{x} \leftarrow \mathbf{x} + \alpha \mathbf{d};$ 
end

```

Algorithm 1: Generic minimization algorithm

Here, we assume that the energy is twice-differentiable. At each step a direction \mathbf{d} is computed and the current point \mathbf{x} is moved along this direction. The function `stepSize` may for example be a line-search that regulates the amplitude of this movement in order to respect variables bounds and/or energy decrease. The convergence criterion used is often based on the norm $|\nabla E(x)|$ of the gradient. When this norm is below a given tolerance, a critical (i.e. minimum, saddle, or a maximum) point has probably been reached.

First-order methods. First-order methods only use the value of the energy and its gradient to perform the minimization. The standard *gradient descent* algorithm, called GRADDESC, uses a first-order approximation of the energy and follows the opposite of the gradient to decrease the energy: `sysMat` is the identity, and we take `stepSize` = 1. After a few iterations first-order methods are however generally slow as the gradient becomes small when approaching a minimum.

400 *Second-order methods.* To increase convergence speed, a second-order approximation of the energy can be used. In this case, the function `sysMat` computes the Hessian $\mathcal{H}E(x)$ of the energy. If we still take `stepSize` = 1, we have a pure *Newton* method, called `NEWTON`. Near the solution, the error $|\nabla E(x)|$ is small and the method benefits from a quadratic convergence. However, this method
 405 only converges to an extremum, not necessarily a minimum. It may also diverge for a number of reasons: (i) convergence is guaranteed only for convex functions, which is not the case here, (ii) the second-order approximation is local, if \mathbf{d} is too large, the new point \mathbf{x} can be unreasonable, i.e. with too large curvature variables, and (iii) the term (14b) in the energy can diverge if the constraint
 410 $|n| \leq \frac{2}{w}$, see (3), is not taken into account.

Since the pure Newton method does not necessarily provide a descent direction in the non-convex case, we introduce a variant called `NEWTONC`. When \mathbf{d} is not a descent direction, i.e. $\mathbf{d}^T \mathcal{H}E(x) \mathbf{d} < 0$, `NEWTONC` switches to a gradient descent step. Moreover, a line-search is used and the bound check $|n| \leq \frac{2}{w}$
 415 is turned on. Convergence is improved in some cases, but the algorithm often remains stuck in a gradient descent region, where convergence speed is not satisfactory.

Finally, `NEWTONR` is yet another variant introduced to cope with non-convexity. There, `sysMat` computes the Hessian of the energy and its smallest
 420 eigenvalue μ . If $\mu < 10^{-8}$, the Hessian is regularized by adding $10|\mu|I$ to it. A line-search complements this method which is virtually as robust and efficient as `IPOPT-HESS`.

As a side note, we have also tested `NEWTONCG`, a truncated Newton method using a modified version of the Conjugate Gradient algorithm. While performing
 425 better than `NEWTONC`, this method proved to be slower than `NEWTONR`, presumably due to the fact that our Hessian is non-sparse.

Quasi-Newton methods. As explained in section 3.3, the cost of calculating the gradient increases quadratically with the number of elements, while the cost for the Hessian increases cubically. Quasi-Newton methods avoid the computation
 430 of the Hessian of the energy. A well-known example is the BFGS algorithm [37] which builds an approximation of the Hessian, and corrects it at each iteration. Under a convexity assumption, the approximation is known to converge to the real Hessian. This method nevertheless requires a larger number of steps which means a larger number of evaluations of the energy and its gradient, and we
 435 show in table 4.2 that the L-BFGS method from `IPOPT` is unsatisfactory.

Evaluation. We compare our different numerical strategies to find a target stable equilibrium configuration. For the sake of simplicity we use here the simpler Sadowsky model and do not take the smoothness constraint (3) into account (the influence of this constraint is later discussed in section 5.4). We normalize
 440 the physical quantities with the length L of the ribbon and its bending rigidity Dw . Consequently, once the Poisson ratio is chosen (we use $\nu = 0.4$) there are only two dimensionless parameters, $\Gamma = MgL^2/(Dw)$ and $K_N = \kappa_N L$, where $M = \rho hwL$ is the total mass of the ribbon and $g = 9.81 \text{ m/s}^2$ is the acceleration of gravity. Here we only consider a uniform natural curvature $d\kappa_N/ds = 0$, $\forall s$.
 445 As illustrated in figure 5, we study three cases of increasing complexity, from a gently curved, sagging ribbon ($K_N = -10$, $\Gamma = 100$) to a highly curved, heavy ribbon ($K_N = -100$, $\Gamma = 7500$). The structure is clamped at one end, and free

	Iterations	# {E} ^a	# {∇E} ^b	# {HE} ^c	time (sec)
IPOPT-HESS	43	87	44	43	9.8
IPOPT-L-BFGS	> 1000 ^d	15379	1001	0	367.5

^aNumber of function evaluations

^bNumber of gradient evaluations

^cNumber of Hessian evaluations

^dAlgorithm was stopped at 1000 iterations, even if the convergence was not reached.

Table 1: To test the added value of having access to the Hessian of the energy, we compute the static equilibrium of a ribbon with IPOPT in two ways: (first line) feeding IPOPT with the Hessian $\mathcal{H}E$, or (second line) not providing the Hessian but using the L-BFGS option of IPOPT. We use a ribbon with length $L = 50$ cm, width $w = 0.5$ cm, thickness $h = 0.1$ mm, area density $\rho = 2000$ kg/m³, Young modulus $Y = 1.8$ GPa, Poisson ratio $\nu = 0.5$, and natural normal curvature $\kappa_N = 80$ m⁻¹. The ribbon is clamped with a $\alpha = \frac{\pi}{4}$ angle with respect to the vertical axis.

at the other. We choose the orientation $\mathbf{g} = -\mathbf{e}_x$, $\mathbf{d}_1(s=0) = \cos \alpha \mathbf{e}_x + \sin \alpha \mathbf{e}_y$, and $\mathbf{d}_3(s=0) = \mathbf{e}_z$, with $\alpha = \pi/4$. In the minimization routines, the two parameters K_N and Γ are directly set to their targeted values and the routines are initiated with the natural shape of the ribbon. For the first case we use $p = 10$ elements, while for the two others we use $p = 20$.

Results are listed in Table 2 and we see that methods based on pure Newton, gradient descent steps (or a mix of the two) are unable to converge to the equilibrium starting from the natural shape. By contrast, methods monitoring the Hessian matrix and enforcing its positiveness converge in all three cases. Line-search procedures, present in NEWTONR and IPOPT-HESS for example, sometimes reduce the step size taken during the Newton iteration, thereby preventing the algorithm from sending the actual point too far in the energy landscape.

Method	$K_N = 10, \Gamma = 100$	$K_N = 40, \Gamma = 1200$	$K_N = 100, \Gamma = 7500$
GRADDES	- (> 500 steps)	- (> 600 steps)	- (> 600 steps)
BFGS	272 steps, 0.5 sec.	506 steps, 6.2 sec.	554 steps, 30 sec.
NEWTON	- (diverges)	- (diverges)	- (diverges)
NEWTONC	- (> 500 steps)	- (> 500 steps)	- (> 500 steps)
NEWTONR	14 steps, 0.1 sec.	24 steps, 1.2 sec.	46 steps, 8.6 sec.
IPOPT-HESS	11 steps, 0.09 sec.	23 steps, 0.9 sec.	35 steps, 5.8 sec.
AUTO	30 steps, 0.11 sec.	45 steps, 0.16 sec.	167 steps, 0.9 sec.
SHOOTING	42 steps, 8 sec.	78 steps, 16 sec.	784 steps, 360 sec.

Table 2: Reaching a stable equilibrium with various algorithms, on the three test cases depicted in figure 5, using the Sadowsky energy. Among minimization methods applied on our discrete model (top), only NEWTONR and IPOPT-HESS perform robustly: they both combine exact second-order information and regularization. Among continuation methods using a strong formulation of ribbons (bottom), AUTO proves to be very fast as it even outperforms best minimization methods applied to our model for a large number of elements. Current continuation methods are however limited to the Sadowsky energy, and cannot easily accommodate the Wunderlich energy nor the smoothness constraint (3), which in contrast are well accounted for by our approach.

Finally, in order to test whether the numerical difficulties of the first three minimization methods arise from the non-quadratic elastic energy of the ribbon model, we have performed the same equilibrium search with the Kirchhoff model

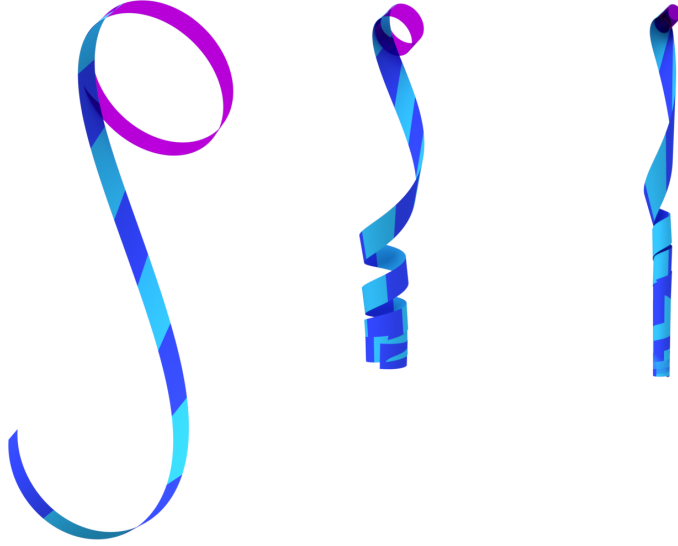


Figure 5: Three test cases of increasing complexity: (left) $K_N = 10$ and $\Gamma = 100$, simulated with $p = 10$ elements, (middle) $K_N = 40$ and $\Gamma = 1200$, simulated with $p = 20$ elements, and (right) $K_N = 100$ and $\Gamma = 7500$, simulated with $p = 20$ elements. The natural shape is depicted in purple, and energy minimization algorithms are all initialized with the natural shape. For comparison purposes, the (simpler) Sadowsky energy is considered. Timing comparisons are provided in Table 2.

for elastic rods discretized with linear-curvature elements [27]. Overall convergence is somewhat faster and the pure Newton method manages to converge in this case, but no substantial difference is observed.

5. Results and validation

We have compared our numerical model against various alternative approaches. These comparisons show the accuracy, robustness, practicability and versatility of our model, which allows us to envision interesting applications such as the fast exploration of multiple ribbon static configurations (please refer to our accompanying video for a better visualization of some results). We additionally show recent experimental study conducted with the aim of confronting the model to real scenarios.

5.1. Comparison with the Kirchhoff model for thin elastic rods

We consider a naturally curved ribbon hanging under its own weight. The ribbon is clamped at one extremity and free at the other. We use the following physical parameters: length $L = 50$ cm, width $w = 1$ cm, thickness $h = 0.1$ mm, density $\rho = 1000$ kg/m³, Young's modulus $Y = 1.8$ GPa, Poisson's ratio $\nu = 0.5$, acceleration of gravity $g = 9.81$ m/s². The natural curvature is chosen to be $\kappa_N = 60$ m⁻¹, hence in its natural state the ribbon is winding on itself, making approximately 5 turns. We numerically compute the equilibrium state of the ribbon using our approach with the Wunderlich energy. The structure is divided into 20 elements, and we start the minimizing procedure with a flat and

485 horizontal initial state. Convergence is reached after 36 iterations in 2 seconds, the equilibrium state is shown in blue in figure 6-right.

Next we use the Kirchhoff model [38, 39] for twisted elastic rods to compute the equilibrium of the system. The Kirchhoff model is accurate for rods with, for example, circular or rectangle cross-sections as long as the aspect ratio of the section is not too large. For rectangle sections with $w/h \gg 1$, the ribbon and the Kirchhoff models generate static configurations that can be different from each other, with experiments validating the ribbon model [11, 12]. The major difference between the two models comes from the twist-curvature coupling present in the case of the ribbon. In the Kirchhoff rod model, the elastic energy is a quadratic function of the curvatures

$$E_K(\kappa_1, \kappa_2, \kappa_3) = \int_0^L \frac{1}{2} (K_{11}(\kappa_1 - \kappa_N)^2 + K_{22}\kappa_2^2 + K_{33}\kappa_3^2) ds \quad (17)$$

where the stiffness coefficients are, for a rectangular section [40]

$$K_{11} = YI_1, \quad K_{22} = YI_2, \quad K_{33} = \frac{Y}{2(1+\nu)} J \quad (18a)$$

$$I_1 = \frac{h^3 w}{12}, \quad I_2 = \frac{h w^3}{12}, \quad J = c_J \frac{h^3 w}{3} \quad (18b)$$

$$c_J = 1 - \frac{192}{\pi^5} \frac{h}{w} \sum_{k=0}^{\infty} \frac{\tanh \frac{(2k+1)\pi w}{2h}}{(2k+1)^5}. \quad (18c)$$

In the present case where $w = 100h$, we have $J \simeq \frac{h^3 w}{3}$. We choose to recalibrate the rod bending stiffness YI_1 with its equivalent for ribbons Dw by taking $K_{11} = \frac{YI_1}{1-\nu^2} = Dw$. Both models then have the same rigidity compared to bending in the soft direction. Using physical parameters of the structure, we evaluate $K_{11} = 0.002$, $K_{22} = 15$, and $K_{33} = 0.006 \text{ mN m}^2$. For the Kirchhoff rod model, we use the same spatial discretization (i.e. super-clothoids [27]) as above and also perform the approximation of putting the mass on the center-line. The energy of gravity is then the same in both models, only the elastic energies differ. Using the same minimization procedure, we obtain the equilibrium solution shown in orange in figure 6-right.

We compare the ribbon and the Kirchhoff models as we vary the total length L from 1 cm to 50 cm, and we show in the figure 6 some characteristic stages of this numerical experiment. For short lengths, the elastic energy dominates and the structure adopts a shape close to its natural curvature. Then, from $L = 5$ cm, gravity is no longer negligible and the structure unfolds, but remains in the plane. Finally from $L \approx 29$ cm the ribbon swings out of the plane, torsion appears. We notice that the two models perfectly coincide at the beginning and deviate from each other as soon as torsion comes into play.

5.2. Comparison with an elastic shell model

Next we study how finite element computations of elastic shells compare with the elastic ribbon model and with our numerical scheme. We use the first case of section 4.2 ($K_N = 10$, $\Gamma = 100$, and $\nu = 0.4$, Sadowsky's formulation, see figure 5-left) and compare it to the equilibrium solution of the Naghdi shell model [42] – a general thin shell theory relying upon a mid-surface combined with straight (but not necessarily normal) transverse directors (so-called

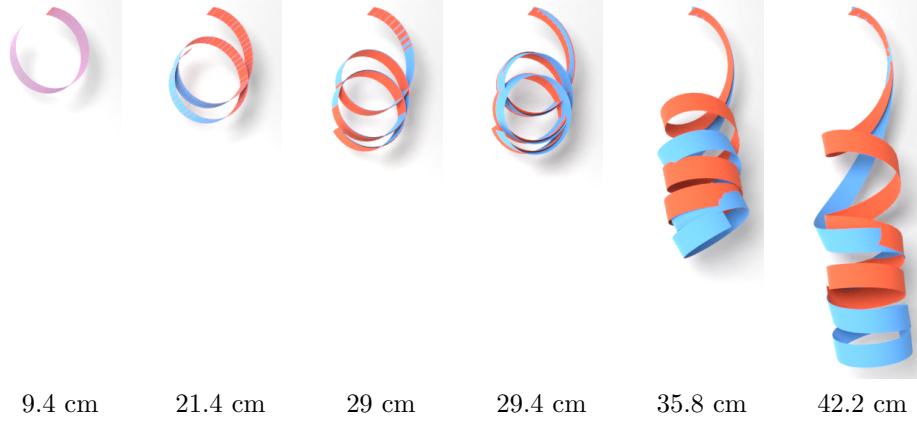


Figure 6: A ribbon cannot be properly simulated using a rod model with a rectangular cross-section. Here we compare the equilibria generated by our discrete ribbon model (in blue) with that of the super-clothoid rod model with the same rectangular cross-section (in orange), when increasing their length. Both models coincide when the configuration is planar (until $L \approx 29$ cm), but substantially diverge when torsion enters the game (see accompanying video).

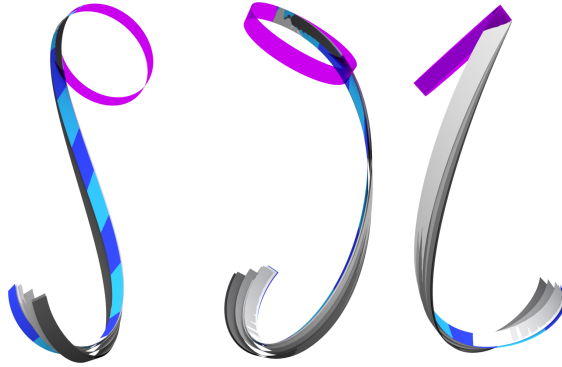


Figure 7: Comparison of our method (in blue) with the FENICS-SHELL finite element code implementing the Naghdi shell model (six increasing width/thickness ratios depicted with different gray levels), under three different viewpoints (see accompanying video).


Reissner-Mindlin kinematic assumptions) – with $w/L = 0.03$ and $w/h = 10$, 20, 50, 100, and 200. Elastic ribbon models, designed for structures with $L \gg w \gg h$, are derived from shell theories where the shell stretching and shearing energies are discarded and where the curvature energy is integrated over the width w . They have been shown to compare well with experiments when the ratio w/h is large enough, typically $w/h > 75$, but fail to capture the behavior of the structure when $w/h < 30$ [12]. We use the Python-based FENICS-SHELL finite element library to compute the static solution of the Naghdi shell model. This implementation includes director parameterization, in the line of [41]. The shell is discretized over a triangular 100×4 mesh, using the the partial reduced selective integration (PRSI) proposed in [43] and adapted to nonlinear shells in [44]. Continuation takes from two ($w/h = 10$) to four ($w/h = 200$) minutes to reach $\{K_N = 10, \Gamma = 100\}$, to be compared with the 0.1 seconds needed for our ribbon simulator (Table 2). In figure 7, we see that the shell equilibrium differs from the ribbon equilibrium at low w/h ratios, but eventually converges to it at large w/h ratios.

5.3. Comparison with continuation methods

An alternative way to find equilibrium³ configurations is to derive differential equations corresponding to the first variation of the energy of the system. In Appendix A we list such differential equations and boundary conditions for the Sadowsky energy (8). To our knowledge, continuation has never been applied to the Wunderlich energy combined with the inequality constraint (3) and natural curvature. In this sense, it is less general than our approach.

Continuation methods. The first continuation method we have used is a classical shooting method. Differential equations are integrated with a stiff solver in Mathematica [45] and the unknown initial values ($\mathbf{n}(s = 0)$ and $\mathbf{m}(s = 0)$) are found with the numerical root solver of Mathematica. This shooting method is easy and quick to set up but not robust. The second continuation method we have used is the Fortran-based AUTO [46, 47, 9] package. The spatial discretization is based on orthogonal collocation involving Lagrange polynomials of degree $NCOL$ and comprising $NTST$ segments. Once discretized the boundary value problem takes the form of a nonlinear algebraic system of size $NDIM \times NCOL \times NTST$, where $NDIM$ is the size of the differential system ($NDIM = 20$ in the present case). The algebraic system is solved with a Newton-Chord method using numerical differentiation for the computation of the Jacobian (a.k.a. Hessian in the minimization formalism) matrix.

Cross-validation. We compare the equilibrium shape obtained using our approach with the shape obtained with the shooting method. We use the following parameters: thickness $h = 0.1$ mm, width $w = 1.5$ cm, length $L = 50$ cm, natural curvature $\kappa_N = 30 \text{ m}^{-1}$, density $\rho = 1000 \text{ kg/m}^3$, Poisson's ratio $\nu = 0.5$, and Young's modulus $Y = 1.8 \text{ GPa}$. Both shapes, plotted



³However, a major difference between energy minimization and continuation methods is that the former searches for stable configurations, while the latter searches for any critical configuration. Hence, when comparing the two, we restrict to stable equilibria.

Figure 8: Exactly same configuration found by our method (blue) and the shooting method (green).

in figure 8, are identical, which validates our approach
 565 on the Sadowsky model.

Timing comparisons. We consider again the three
 test cases studied in section 4.2 and illustrated in figure
 5. This time we seek to obtain the stable equilibrium
 configurations by continuation.

570 In the continuation routines K_N is set directly
 to its targeted value and Γ is gradually increased
 from $\Gamma = 0$ to the desired target value. For each
 intermediate Γ value an equilibrium configuration is
 computed in our shooting routine in Mathematica,
 575 and in AUTO with a polynomial degree $NCOL = 4$ and $NTST = 10$ elements
 for the first case, $NTST = 15$ elements for the second case, and $NTST = 35$ el-
 ements for the third case. The fastest routine is the continuation method AUTO
 even if the number of steps (i.e. intermediate values of Γ visited) is larger than
 in the minimization routines. (Note that in addition, a Newton correction is
 580 used in AUTO at each intermediate Γ value.)

On the Sadowsky problem, AUTO thus proves more efficient than best min-
 imization algorithms performed on our discrete energy, especially for a large
 number of elements. However, continuation approaches cannot easily handle
 inequality constraints in general. In particular the inequality (3) of the Wun-
 derlich model is challenging to account for. To the best of our knowledge, only
 585 [8] so far has proposed to tackle this constraint within a continuation method,
 by adding a regularization term to the Wunderlich energy. However, the authors
 acknowledge that this ad-hoc solution perturbs the ribbon equilibrium solutions
 as the width w increases, which makes it only suitable for a moderate range of
 widths. For large ribbons (large w), the Wunderlich constraint becomes crucial,
 590 and we show in the following that removing this constraint from the model may
 lead to fatal numerical issues. In contrast, our more versatile approach allows
 us to account for this constraint properly.

5.4. Active Wunderlich constraint

595 We now use the Wunderlich model and show a case where the inequality
 constraint (3) is active⁴, i.e. $\exists s^*/|\eta'(s^*)| w = 2$. We use the following physical
 parameters: length $L = 32$ cm, width $w = 2$ cm, thickness $h = 0.1$ mm,
 density $\rho = 2000$ kg/m³, Young's modulus $Y = 2.016$ GPa, Poisson's ratio
 $\nu = 0.4$, uniform natural curvature $\kappa_N = -31.25$ m⁻¹, and $\mathbf{g} = -g \mathbf{e}_x$ with
 600 the acceleration of gravity $g = 9.81$ m/s². The clamp at $s = 0$ is oriented with
 $\alpha = \pi/4$. After normalization with the length L and the bending rigidity Dw of
 the ribbon, the two dimensionless parameters are $\Gamma = 321.454$ and $K_N = -10$.
 We use IPOPT-HESS with $p = 40$ elements to minimize the Wunderlich energy
 under the inequality constraint (3). We start the minimization routine with a
 605 state with uniform curvatures $\kappa_1(s) = -\kappa_N$, and $\kappa_3(s) = 0, \forall s$. The equilibrium
 solution is reached in 7.5 seconds and 38 iterations. This state has intersecting
 rulings near $s = 9$ cm, see figure 9.

⁴As the Wunderlich elastic energy diverges when the constraint is active and as the solver
 only handles large inequalities, we numerically set the bound to $2 - \epsilon$ with $\epsilon = 10^{-8}$

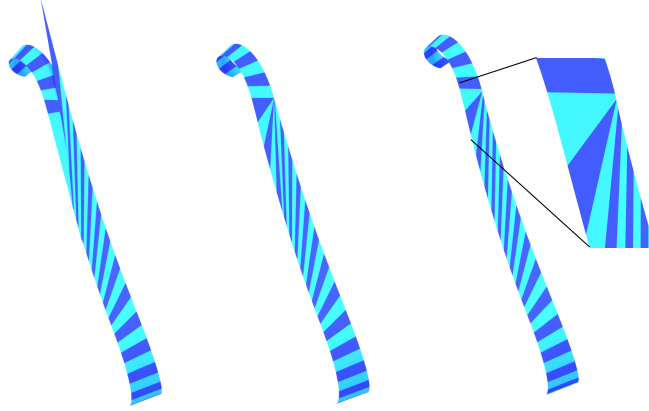


Figure 9: Configuration where bounds are reached. Left and middle: results obtained using the Sadowsky model, (left) without and (middle) with the Wunderlich constraint (3). Right: result using the Wunderlich model and the constraint (3), and zoom on the region where the constraint is active (convergence of the rulings close to the boundary). Without the Wunderlich constraint, simulating the Wunderlich model leads to fatal numerical issues.

5.5. Multiple solutions

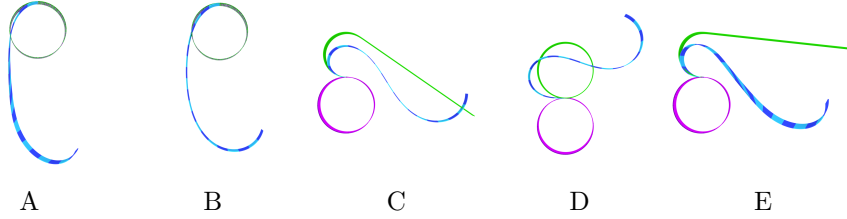


Figure 10: Five concurrent equilibria with $K_N = -8$ and $\Gamma = 85$, using $p = 20$ elements. The natural state is shown in purple, the initial state for the solving routine in green, and the equilibrium state in navy blue/turquoise. Please note that for visualization purposes, ribbons are displayed here with an increased thickness.

The nonlinear problem of finding equilibria of elastic ribbons may have several concurrent solutions. We illustrate this possibility by selecting parameter values for which at least five (plus two symmetric solutions) different solutions exist. We work with dimensionless quantities and set $K_N = -8$, $\Gamma = 85$, $\nu = 0.4$, and $p = 20$. Some of these solutions have proven difficult to find: shooting procedures based on the Sadowsky formulation failed to find them. Consequently, we turn to the Wunderlich formulation along with the inequality constraint (3) (that sometimes prevents the minimization procedure to go haywire) and therefore fix the dimensionless width, $w/L = 0.03$. We choose the orientation $\mathbf{g} = -\mathbf{e}_x$ and $\alpha = \pi/2$. We use IPOPT to find the stable equilibrium solutions. Feeding the algorithm with different initial states, we isolate two such solutions, see (A) and (E) in figure 10. These two solutions are 3D and twisted ($\eta(s) \neq 0$) and each has a symmetrical twin, not shown here. Additionally, we isolate three planar ($\mathbf{r}(s) \cdot \mathbf{e}_y = 0, \forall s$) and untwisted ($\eta(s) = 0, \forall s$) solutions

with the pure Newton routine, see (B), (C), and (D) in figure 10. These solutions are saddle points in the energy landscape and are therefore unstable: we
625 had to use the pure Newton routine, solving for roots of the gradient of the energy instead of minimizing the energy itself.

5.6. Comparison with experiments

Currently we are developing a systematic protocol to validate simulators of slender structures. Generally speaking, by means of computer vision techniques,
630 we are able to capture and reconstruct 3D deformed physical objects and project them on images with simulated results. For this work, we use ribbons sagging under their own weight, and the range in which such a problem is well defined, $w/h \gg 1$ and $200 > \Gamma = 12(1 - \nu^2)\rho g L^3/(Yh^3) > 10$ and $L/w > 10$, limits the dimensions of model specimens and puts constraints on materials manu-
635 facturing and characterization. We have found that the best option is to work with commercial polymeric plastics such as BoPP (Bi-Oriented Polypropylene), BoPET (Bi-Oriented Polyethylene Terephthalate), Acetate (butylene adipate-co-terephthalate), or PVC (PolyVinyl Chloride) with Elastic moduli in the 2–4 GPa range, and density around 10^3 kg/m^3 . These polymeric plastics are com-
640 mercially available with thicknesses in the range $[50 - 500] \mu\text{m}$. Such materials are elastic within the deformation we are expecting, but they are not completely isotropic. Furthermore their mechanical parameters vary from sample to sample or are difficult to measure (in particular Poisson’s ratio). Hence it proves difficult, for a given experiment, to accurately simulate complex configurations, i.e. with large torsion.
645

Nevertheless, there are some basic configurations where we are able to quantitatively or/and qualitatively compare numerics with experiments. In this section we begin by showing a perfect agreement between our simulations, experiments, and theory for the simple cantilever case with no torsion and no
650 natural curvature. Next, we compare a clamped naturally curved ribbon with the output of our simulator. In this case we found that, despite the match is not perfect, most of the geometrical characteristics are well generated by our synthetic output.

Cantilever experiment

A variation of the well-known Galileo cantilever is commonly used in mechanics of soft elastic objects to estimate material parameters. It consists of a horizontally clamped elastic object with a free end, deformed by the action of gravity, as depicted in the inset of figure 11. The global aspect ratio of the deformed shape (vertical divided by horizontal positions of free end) follows a
660 master curve when plotted against the non-dimensional gravito-bending parameter Γ .

To test our code, we set simulations of naturally flat ribbons with fixed width ($w = 5\text{cm}$), density ($\rho = 1200\text{kg/m}^3$), thickness ($h = 1\text{mm}$), and Poisson’s Ratio ($\nu = 0.5$), and span the Elastic modulus in the range $Y \in [0.5 - 100]$
665 MPa and the length within a range $L \in [5 - 90] \text{ cm}$. For each of the 2500 simulations we measure the horizontal (x) and vertical (y) components of the position of the ribbon free end, and plot the aspect ratio (y/x) as a function of Γ in fig. 11. Next, we numerically solve the equations for a planar elastica with bending rigidity $Yh^3w/(12(1 - \nu^2))$ and show the result as a solid red line in

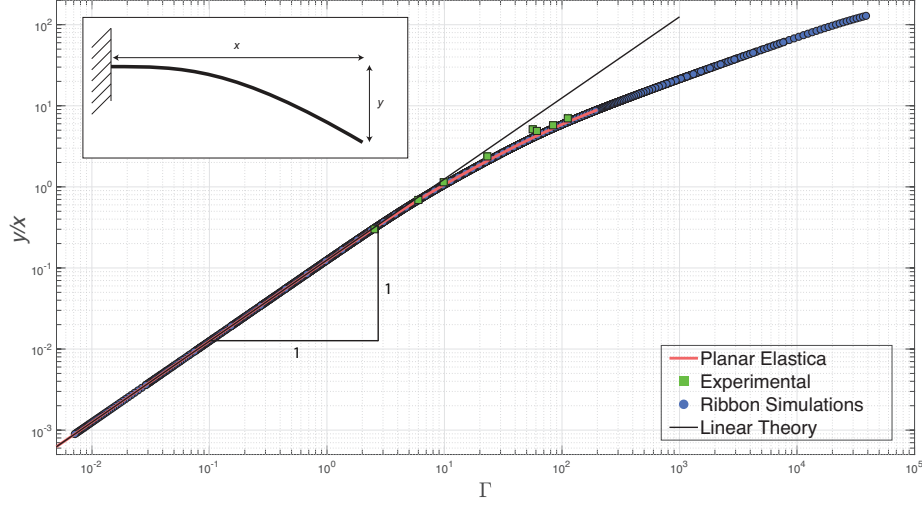


Figure 11: Aspect ratio y/x of the deformed shape of a sagging cantilever, as function of the gravito-bending parameter Γ , evaluated in four ways: linear theory, $y/x = \Gamma/8$ valid for small Γ , planar elastica computations, elastic ribbons computations, and experiments.

670 figure 11. Finally, we run a series of experiments (green squares) with nominally
flat ribbons. We first independently estimate $Y/(1 - \nu^2)$ for each ribbon as
described in appendix B in [48]. We measure the aspect ratios (y/x) of the
deformed shapes and plot them as function of Γ in green in fig. 11. A perfect
agreement between experiments and ribbon and elastica simulations is observed
675 for the large range of studied Γ values.

3D deformations for naturally curved ribbons

We now turn to the more interesting case of naturally curved ribbons. The
main challenges here are manufacturing such ribbons and accurately estimating
both their Young modulus and Poisson's ratio. Inspired by the method described
680 in [49] we fabricate curly ribbons by winding flat specimens around a metallic
cylinder, keeping them at 80 degrees Celsius for 24 hours, and finally letting
them cool down while still attached to the cylinder. We tested several materials
and observed that only PVC and BoPET adopt an acceptable circular shape,
but we find that the resulting radius of curvature is in general larger than that
685 of the metallic cylinder.

In figure 12 we show two perpendicular views for one experimental realization
with a sample made out of BoPET (right panels for each view). We measured
the ribbon's thickness to be $100\mu\text{m}$, its length 290mm, its natural curvature
 26.7m^{-1} , its width 30mm, and density 1253kg/m^3 . For the ribbon's elastic
690 parameters we estimated that the value of $Y/(1 - \nu^2)$ is in the range of 2–4MPa.
Since we are dealing with high torsion, Poisson's ratio plays an important role
in the final shape, but we are yet not able to obtain a precise estimation of it,
thus we use the classical value $\nu = 0.4$.

For capturing the images of the ribbon, we use a rig with a camera and
695 a mirror. We calibrate the corresponding views as pinhole model cameras, as
described in [50]. This technique, together with a marker, allows us to exper-

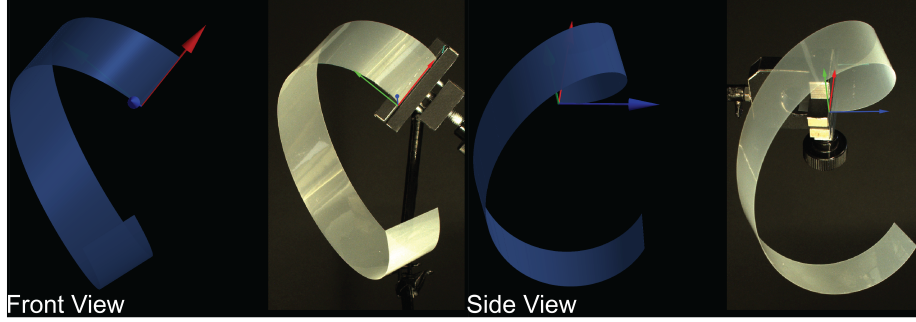


Figure 12: Side by side comparison between simulations (blue) and experiments (gray). Left pair shows a front view and right pair a side view.

imentally measure the material frame orientation at the clamp (red, green and blue arrows in the experimental images represent $\{\mathbf{d}_1(0), \mathbf{d}_2(0), \mathbf{d}_3(0)\}$ respectively). Thus the initial frame is fed into the simulator in addition to the elastic and geometrical parameters. As a result, we obtain a synthetic deformed shape for the ribbon (blue), see figure 12.

It is important to mention that for computing the simulated ribbon, we did fine tune the value of $Y/(1 - \nu^2)$ to be 4MPa, which is in the high limit of the estimated range. For a full validation of our model, in the future we will need to figure out a more accurate way to estimate the elasticity of the experimental ribbons.

6. Conclusion and future work

We have proposed a robust and accurate computational approach dedicated to the statics of inextensible elastic ribbons, relying on the recent Wunderlich model. The key of our discrete model is to combine curvature-based elements with reduced parameterization, analytic computation of all kinematic and static terms based on power series, including the Hessian of energy, and robust second-order minimization of energy under the Wunderlich constraint. We have tested our method on various ribbon configurations, from straight to highly curly, and have always observed excellent convergence in reasonable timings (a few seconds for 20 elements). Moreover, we have highlighted the value of carefully treating the Wunderlich energy together with the smoothness constraint. Less versatile approaches limited to the simpler Sadowsky energy, like current continuation methods, may lead to wrong ribbon configurations and/or serious numerical issues when encountering configurations close to the Wunderlich bounds. Finally, we have shown in our comparisons that a numerical model dedicated to ribbons is perfectly justified: rod models are inappropriate to capture the specific twist-curvature coupling of ribbons as they do not preserve inextensibility of the surface, while a generic shell model may reach the limit case of a thin ribbon but at the price of much heavier computations.

All of this makes our discrete model a practical tool suitable for exploring a wide range of new ribbon equilibrium configurations. In the future we hope to enrich the space of configurations by treating clamped-clamped boundary

conditions, as well as self-contact and friction. We would also like to extend our
 730 experimental validation setup to a wider range of ribbon configurations.

Acknowledgments

The authors would like to thank Corrado Maurini for his help with FENICS-SHELL, Basile Audoly for fruitful discussions about the ribbon clamping conditions, Mickaël Ly for rendering some of the figures and making the accompanying
 735 video, and José Bico and Benoit Roman for their support with materials and manufacturing. We used the free software Blender for rendering all our tridimensional figures. This work was supported in part by the ERC grant GEM (StG-2014-639139).

Appendix A. Strong formulation of the equilibrium of a Sadowsky ribbon

740

We list the system of differential equations describing the equilibrium of a ribbon with natural curvature κ_N in the approximation of the Sadowsky energy [10, 8]. We normalize the physical quantities with the length L of the ribbon and its bending rigidity Dw . Besides the Poisson ratio ν , only two
 745 dimensionless parameters remain: $\Gamma = \rho h g L^3 / D$ and $K_N = \kappa_N L$. Vector components in the canonical basis are written with (x, y, z) indices and components in the material frame are written with $(1, 2, 3)$ indices. The strong formulation of the equilibrium equations introduces the internal force \mathbf{n} and moment \mathbf{m} . We recall that we are in the case where

$$\kappa_2(s, t) = 0 \quad \forall (s, t) \quad (\text{A.1})$$

and that we replace $\kappa_3(s)$ by $\eta(s) \kappa_1(s)$. The nonlinear constitutive relation reads

$$m_1 = \left(1 - \frac{\kappa_3^4}{\kappa_1^4}\right) \kappa_1 - K_N \left(1 - \nu \frac{\kappa_3^2}{\kappa_1^2}\right) \quad (\text{A.2a})$$

$$m_3 = 2 \left(1 + \frac{\kappa_3^2}{\kappa_1^2}\right) \kappa_3 - 2K_N \nu \frac{\kappa_3}{\kappa_1} \quad (\text{A.2b})$$

As explained in [12] using (A.2) would result in having to deal with a differential-algebraic system, which we wish to avoid. Consequently we differentiate (A.2) and solve for κ_1' and κ_3' to write

$$\kappa_1' = \frac{\kappa_1^3}{(\kappa_1^2 + \kappa_3^2)^2} \frac{\kappa_1 m_1' (-K_N \nu \kappa_1 + \kappa_1^2 + 3\kappa_3^2) + \kappa_3 m_3' (-K_N \nu \kappa_1 + 2\kappa_3^2)}{-K_N \nu \kappa_1 + \kappa_1^2 + \kappa_3^2} \quad (\text{A.3a})$$

$$\kappa_3' = \frac{\kappa_1^2}{2(\kappa_1^2 + \kappa_3^2)^2} \frac{2\kappa_1 \kappa_3 m_1' (-K_N \nu \kappa_1 + 2\kappa_3^2) + m_3' (\kappa_1^4 - 2K_N \nu \kappa_1 \kappa_3^2 + 3\kappa_3^4)}{-K_N \nu \kappa_1 + \kappa_1^2 + \kappa_3^2} \quad (\text{A.3b})$$

750 These two equations are coupled with the classical (Kirchhoff-like) equations for position, equilibrium of force and moment

$$r'_x = d_{3x}, \quad n'_1 = n_2 \kappa_3 - n_3 \kappa_2 - f_1, \quad m'_1 = m_2 \kappa_3 - m_3 \kappa_2 + n_2 \quad (\text{A.4a})$$

$$r'_y = d_{3y}, \quad n'_2 = n_3 \kappa_1 - n_1 \kappa_3 - f_2, \quad m'_2 = m_3 \kappa_1 - m_1 \kappa_3 - n_1 \quad (\text{A.4b})$$

$$r'_z = d_{3z}, \quad n'_3 = n_1 \kappa_2 - n_2 \kappa_1 - f_3, \quad m'_3 = m_1 \kappa_2 - m_2 \kappa_1 \quad (\text{A.4c})$$

and material frame

$$d'_{1x} = \kappa_3 d_{2x} - \kappa_2 d_{3x}, \quad d'_{1y} = \kappa_3 d_{2y} - \kappa_2 d_{3y}, \quad d'_{1z} = \kappa_3 d_{2z} - \kappa_2 d_{3z} \quad (\text{A.5a})$$

$$d'_{2x} = \kappa_1 d_{3x} - \kappa_3 d_{1x}, \quad d'_{2y} = \kappa_1 d_{3y} - \kappa_3 d_{1y}, \quad d'_{2z} = \kappa_1 d_{3z} - \kappa_3 d_{1z} \quad (\text{A.5b})$$

$$d'_{3x} = \kappa_2 d_{1x} - \kappa_1 d_{2x}, \quad d'_{3y} = \kappa_2 d_{1y} - \kappa_1 d_{2y}, \quad d'_{3z} = \kappa_2 d_{1z} - \kappa_1 d_{2z} \quad (\text{A.5c})$$

with $f_i = \Gamma \mathbf{d}_i \cdot \frac{\mathbf{g}}{\|\mathbf{g}\|}$, $i = 1, 2, 3$. The boundary condition at the clamp, $s = 0$, reads

$$\mathbf{r}(0) = \mathbf{r}_0, \quad \mathbf{d}_1(0) = \mathcal{R}_0 \cdot \mathbf{e}_x, \quad \mathbf{d}_2(0) = \mathcal{R}_0 \cdot \mathbf{e}_y, \quad \mathbf{d}_3(0) = \mathcal{R}_0 \cdot \mathbf{e}_z \quad (\text{A.6})$$

755 and the boundary conditions are the free end, $s = 1$, are

$$n_1(1) = 0 = n_2(1) = n_3(1) \text{ and } m_1(1) = 0 = m_2(1) = m_3(1) \quad (\text{A.7})$$

Appendix B. Comparison with a shearable rod model

In this Section, we compare the Sadowsky model for elastic ribbon to Antman's rod model, which includes shear and extensional deformations [51]. We consider a structure of length L with rectangular cross-section of width w and thickness h and we compute the equilibrium of the structure in the clamp-free setup used throughout this report. The Antman model is the 3D version of the Reissner model [52] for elastic beams bent in the plane, and is an extension of the Kirchhoff model in the sense that both shear and extensional deformations are possible. The shear $v_1(s)$, $v_2(s)$ and extension $v_3(s)$ components are introduced to express the tangent to the centerline in the Cosserat frame as

$$r'_x = v_1 d_{1x} + v_2 d_{2x} + v_3 d_{3x} \quad (\text{B.1a})$$

$$r'_y = v_1 d_{1y} + v_2 d_{2y} + v_3 d_{3y} \quad (\text{B.1b})$$

$$r'_z = v_1 d_{1z} + v_2 d_{2z} + v_3 d_{3z}. \quad (\text{B.1c})$$

Shear and extension are related to the internal force \mathbf{n} through a linear relationship written in the Cosserat frame,

$$v_1 = \frac{n_1}{H_1}, \quad v_2 = \frac{n_2}{H_2}, \quad v_3 = 1 + \frac{n_3}{H_3}, \quad (\text{B.2})$$

760 where we take $H_1 = \frac{Y}{2(1+\nu)}hw = H_2$ and $H_3 = Yhw$. Note that the precise definition of the stiffness coefficient $H_{1,2}$ may differ in the literature where (near unity) prefactors are sometimes included [53]. We recall that the Kirchhoff model is the limit case

$$\frac{1}{H_1} \rightarrow 0, \quad \frac{1}{H_2} \rightarrow 0, \quad \frac{1}{H_3} \rightarrow 0. \quad (\text{B.3})$$

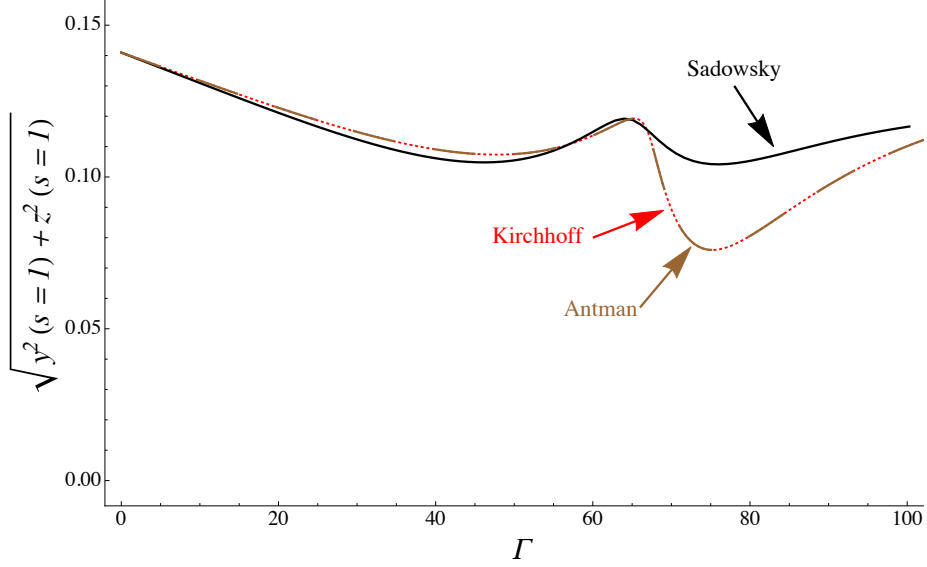


Figure B.13: Comparison of three models for the statics of an elastic ribbon with $L = 30w$, $w = 10h$, $K_N = \kappa_N L = 10$, and $\nu = 0.4$. We plot the end-to-end distance in the plane orthogonal to the gravity direction, $\sqrt{y^2(1) + z^2(1)}$, as a function of $\Gamma = 12(1-\nu^2)\rho g L^3/(Yh^3)$.

Next, the bend-twist constitutive relation is the same as in Kirchhoff's model,

$$m_1 = K_{11}(\kappa_1 - \kappa_N), \quad m_2 = K_{22}\kappa_2, \quad m_3 = K_{33}\kappa_3 \quad (\text{B.4})$$

with the stiffness coefficients given in (18). Classical balance equations for linear and angular momentum read, in component form,

$$n'_1 = n_2 \kappa_3 - n_3 \kappa_2 - f_1 \quad m'_1 = m_2 \kappa_3 - m_3 \kappa_2 + n_2 v_3 - n_3 v_2 \quad (\text{B.5a})$$

$$n'_2 = n_3 \kappa_1 - n_1 \kappa_3 - f_2 \quad m'_2 = m_3 \kappa_1 - m_1 \kappa_3 + n_3 v_1 - n_1 v_3 \quad (\text{B.5b})$$

$$n'_3 = n_1 \kappa_2 - n_2 \kappa_1 - f_3 \quad m'_3 = m_1 \kappa_2 - m_2 \kappa_1 + n_1 v_2 - n_2 v_1. \quad (\text{B.5c})$$

The system of equations is closed to the Darboux equations, listed in (A.5). The set of equations is then made dimensionless using L as unit length and K_{11}/L^2 as unit force. Dimensionless equations are readily obtained by performing the following replacements,

$$K_{11} = 1 \quad K_{22} = \left(\frac{w}{h}\right)^2 \quad K_{33} = \frac{2c_J}{1+\nu} \quad (\text{B.6})$$

$$\frac{1}{H_1} = \frac{1+\nu}{6} \left(\frac{h}{L}\right)^2 \quad \frac{1}{H_2} = \frac{1+\nu}{6} \left(\frac{h}{L}\right)^2 \quad \frac{1}{H_3} = \frac{1}{12} \left(\frac{h}{L}\right)^2 \quad (\text{B.7})$$

where c_J is defined in (18c). In typical situations where $L \gg w$, the non-dimensionalized coefficients $H_{1,2,3} \gg 1$ and hence v_1 and v_2 are small and v_3 near unity, unless internal forces $n_{1,2,3}$ are large. As the typical scale of the internal force in our clamped-free situation is given by the weight, we conclude that as long as $\Gamma \ll \left(\frac{L}{h}\right)^2$, the Antman and Kirchhoff models yield similar results.

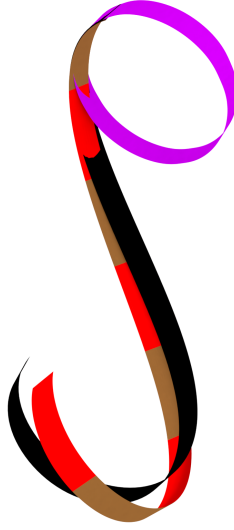


Figure B.14: Comparison of three models for the statics of an elastic ribbon with $L = 30w$, $w = 10h$, $K_N = \kappa_N L = 10$, and $\nu = 0.4$. We show the deformed shape of the structure at $\Gamma = 12(1 - \nu^2)\rho g L^3 / (Y h^3) = 80$. We use the same color conventions as for figure B.13, and, we draw the natural shape of the ribbon in purple. The shapes given by the Kirchhoff and Antman models are virtually the same, but clearly differ from the shape given by the Sadowsky model.

770 In order to illustrate this fact, we compute the equilibrium solution for $\Gamma \in$
 $(0; 100)$, $L = 30w$, $w = 10h$, and a dimensionless natural curvature $K_N =$
 $\kappa_N L = 10$ for the three models: Sadowsky, Kirchhoff, and Antman. We plot
in figure B.13 the end-to-end distance in the plane orthogonal to the gravity
775 direction, $\sqrt{y^2(1) + z^2(1)}$, as a function of Γ . We note that the curves from the
Kirchhoff and Antman models are virtually indistinguishable, while they stand
clearly apart from the curve of the Sadowsky model. In addition, we show in
Figure B.14 the shapes given by the three models for $\Gamma = 80$ and observe again
that shapes from the Kirchhoff and Antman models are indistinguishable.

References

- 780 [1] M. Sadowsky, Die Differentialgleichungen des MÖBIUSschen bandes,
Jahresbericht der Deutschen Mathematiker-Vereinigung (1929) 49–51,
translated in [2].
- [2] R. Fosdick, E. Fried (Eds.), The Mechanics of Ribbons and Moebius Bands,
Springer, 2015, previously published in Journal of Elasticity Volume 119,
785 2015.
- [3] J. Chopin, A. Kudrolli, Helicoids, wrinkles, and loops in twisted ribbons,
Phys. Rev. Lett. 111 (2013) 174302.
- [4] F. A. Moebius, Über die bestimmung des inhaltes eines polyeders (On the
determination of the volume of a polyhedron), Ber. Verh. Sächs. Ges. Wiss.

- 790 17 (1865) 31–68, see also *Gesammelte Werke, Band II* (Collected Works, vol. II), p. 484. Hirzel, Leipzig (1886).
- [5] D. F. Hinz, E. Fried, Translation of Michael Sadowsky’s paper ‘An elementary proof for the existence of a developable Möbius band and the attribution of the geometric problem to a variational problem’, *Journal of Elasticity* 119 (1) (2015) 3–6.
795
- [6] W. Wunderlich, Über ein abwickelbares Möbiusband, *Monatshefte für Mathematik* 66 (3) (1962) 276–289. doi:10.1007/BF01299052.
- [7] E. L. Starostin, G. H. M. van der Heijden, The shape of a Möbius strip, *Nature Materials* 6 (2007) 563. doi:10.1038/nmat1929.
- 800 [8] A. Moore, T. Healey, Computation of elastic equilibria of complete möbius bands and their stability, *Mathematics and Mechanics of Solids* 24 (4) (2019) 939–967. doi:10.1177/1081286518761789.
- [9] E. J. Doedel, B. E. Oldeman, Auto-07p: Continuation and bifurcation software for ordinary differential equations, Tech. rep., Concordia University
805 (2012).
- [10] M. A. Dias, B. Audoly, “Wunderlich, Meet Kirchhoff”: A General and Unified Description of Elastic Ribbons and Thin Rods, *Journal of Elasticity* 119 (1) (2015) 49–66. doi:10.1007/s10659-014-9487-0.
- 810 [11] B. Audoly, K. A. Seffen, Buckling of Naturally Curved Elastic Strips: The Ribbon Model Makes a Difference, *Journal of Elasticity* 119 (1) (2015) 293–320. doi:10.1007/s10659-015-9520-y.
- [12] D. E. Moulton, P. Grandgeorge, S. Neukirch, Stable elastic knots with no self-contact, *Journal of the Mechanics and Physics of Solids* 116 (2018) 33–53. doi:10.1016/j.jmps.2018.03.019.
- 815 [13] T. G. Sano, H. Wada, Twist-induced snapping in a bent elastic rod and ribbon, *Phys. Rev. Lett.* 122 (2019) 114301.
- [14] J. C. Simo, A finite strain beam formulation. The three-dimensional dynamic problem. Part I, *Computer Methods in Applied Mechanics and Engineering* 49 (1) (1985) 55–70.
- 820 [15] M. Borri, C. Bottasso, [An intrinsic beam model based on a helicoidal approximation—Part I: Formulation](#), *International Journal for Numerical Methods in Engineering* 37 (13) (1994) 2267–2289. doi:10.1002/nme.1620371308.
URL <http://dx.doi.org/10.1002/nme.1620371308>
- 825 [16] M. A. Crisfield, G. Jelenić, Objectivity of strain measures in the geometrically exact three-dimensional beam theory and its finite-element implementation, *Proc. Royal Society of London, Series A* 455 (1983) (1998) 1125–1147.
- 830 [17] D. Pai, Strands: Interactive simulation of thin solids using Cosserat models, *Computer Graphics Forum (Proc. Eurographics’02)* 21 (3) (2002) 347–352.

- [18] F. Bertails, B. Audoly, M.-P. Cani, B. Querleux, F. Leroy, J.-L. L  v  que, Super-Helices for Predicting the Dynamics of Natural Hair, *ACM Transactions on Graphics* 25 (2006) 1180–1187. doi:[10.1145/1141911.1142012](https://doi.org/10.1145/1141911.1142012).
- 835 [19] J. Spillmann, M. Becker, M. Teschner, Non-iterative computation of contact forces for deformable objects, *Journal of WSCG* 15 (2007) 33–40.
- [20] S. Goyal, N. Perkins, C. Lee, [Non-linear dynamic intertwining of rods with self-contact](#), *International Journal of Non-Linear Mechanics* 43 (1) (2008) 65 – 73. doi:[10.1016/j.ijnonlinmec.2007.10.004](https://doi.org/10.1016/j.ijnonlinmec.2007.10.004).
840 URL <http://www.sciencedirect.com/science/article/pii/S0020746207001989>
- [21] M. Bergou, M. Wardetzky, S. Robinson, B. Audoly, E. Grinspun, [Discrete elastic rods](#), *ACM Transactions on Graphics (Proc. ACM SIGGRAPH’08)* 27 (3) (2008) 1–12. doi:<http://doi.acm.org/10.1145/1360612.1360662>.
845 URL <http://www.cs.columbia.edu/cg/rods/>
- [22] H. Lang, J. Linn, M. Arnold, [Multi-body dynamics simulation of geometrically exact cosserat rods](#), *Multibody System Dynamics* 25 (3) (2011) 285–312. doi:[10.1007/s11044-010-9223-x](https://doi.org/10.1007/s11044-010-9223-x).
URL <https://doi.org/10.1007/s11044-010-9223-x>
- 850 [23] V. Sonnevile, A. Cardona, O. Br  ls, [Geometrically exact beam finite element formulated on the special Euclidean group SE\(3\)](#), *Computer Methods in Applied Mechanics and Engineering* 268 (2014) 451 – 474. doi:<http://dx.doi.org/10.1016/j.cma.2013.10.008>.
URL <http://www.sciencedirect.com/science/article/pii/S0045782513002600>
855 [S0045782513002600](#)
- [24] F. Renda, F. Boyer, J. Dias, L. Seneviratne, Discrete cosserat approach for multisection soft manipulator dynamics, *IEEE Transactions on Robotics* 34 (6) (2018) 1518–1533. doi:[10.1109/TRO.2018.2868815](https://doi.org/10.1109/TRO.2018.2868815).
- 860 [25] Z. Shen, J. Huang, W. Chen, H. Bao, Geometrically exact simulation of inextensible ribbon, *Computer Graphics Forum* 34 (7) (2015) 145–154.
- [26] Z. Pan, J. Huang, H. Bao, [Modelling Developable Ribbons Using Ruling Bending Coordinates](#), *Computing Research Repository*.
URL <https://arxiv.org/abs/1603.04060>
- [27] R. Casati, F. Bertails-Descoubes, Super Space Clothoids, *ACM Transactions on Graphics* 32 (4) (2013) 48. doi:[10.1145/2461912.2461962](https://doi.org/10.1145/2461912.2461962).
865 [2461962](#)
- [28] A. W  chter, L. T. Biegler, On the implementation of an interior-point filter line-search algorithm for large-scale nonlinear programming, *Mathematical Programming* 106 (1) (2006) 25–57. doi:[10.1007/s10107-004-0559-y](https://doi.org/10.1007/s10107-004-0559-y).
- 870 [29] D. F. Hinz, E. Fried, Translation of Michael Sadowsky’s paper “The Differential Equations of the M  bius Band”, *Journal of Elasticity* 119 (1) (2015) 19–22.

- [30] R. Casati, [Quelques contributions à la modélisation numérique de structures élancées pour l'informatique graphique](#), Ph.D. thesis, Université Grenoble Alpes (2015).
 875 URL <http://www.theses.fr/2015GREAM053/document>
- [31] J.-P. Demailly, *Analyse numérique et équations différentielles*, EDP Sciences, 2006.
- [32] L. Y. Adrianova, *Introduction to Linear Systems of Differential Equations*, Vol. 146 of *Translations of Mathematical Monographs*, American Mathematical Society, 1995.
 880
- [33] F. Bertails, *Linear time super-helices*, *Computer Graphics Forum (Proc. Eurographics'09)* 28 (2).
- [34] M. Neher, *An enclosure method for the solution of linear ODEs with polynomial coefficients*, *Numerical Functional Analysis and Optimization* 20 (1999) 779–803.
 885
- [35] D. Goldberg, *What every computer scientist should know about floating-point arithmetic*, *ACM Comp. Surveys* 23 (1991) 5–48.
- [36] J. Nocedal, S. Wright, *Numerical Optimization*, 2nd Edition, Springer, New York, NY, USA, 2006.
- 890 [37] C. G. Broyden, *The convergence of a class of double-rank minimization algorithms 1. General considerations*, *IMA Journal of Applied Mathematics* 6 (1) (1970) 76–90. doi:10.1093/imamat/6.1.76.
- [38] S. S. Antman, *Nonlinear problems of elasticity*, 2nd Edition, Springer-Verlag, New York, 2004.
- 895 [39] B. Audoly, Y. Pomeau, *Elasticity and Geometry: From hair curls to the nonlinear response of shells*, Oxford University Press, 2010.
- [40] A. I. Lurie, *Theory of Elasticity*, *Foundations of Engineering Mechanics*, Springer, 2005.
- 900 [41] J. Simo, D. Fox, *On a stress resultant geometrically exact shell model. Part I: Formulation and optimal parametrization*, *Computer Methods in Applied Mechanics and Engineering* 72 (3) (1989) 267–304.
- [42] P. M. Naghdi, *Foundations of elastic shell theory*, in: I. N. Sneddon, R. Hill (Eds.), *Progress in Solid Mechanics*, Vol. 4, North-Holland, 1963, pp. 1–90.
- 905 [43] D. N. Arnold, F. Brezzi, *Locking-free finite element methods for shells*, *Mathematics of Computation* 66 (1997) 1–14.
- [44] J. S. Hale, M. Brunetti, S. P. Bordas, C. Maurini, *Simple and extensible plate and shell finite element models through automatic code generation tools*, *Computers & Structures* 209 (2018) 163–181.
- [45] Wolfram Research, *Mathematica*, Version 11, Champaign, IL, USA, 2019.

- 910 [46] E. Doedel, H. B. Keller, J. P. Kernevez, Numerical Analysis and Control of Bifurcation Problems (I) Bifurcation in Finite Dimensions, International Journal of Bifurcation and Chaos 1 (3) (1991) 493–520.
- [47] E. Doedel, H. B. Keller, J. P. Kernevez, Numerical Analysis And Control of Bifurcation Problems (II): Bifurcation In Infinite Dimensions, International
915 Journal of Bifurcation and Chaos 01 (04) (1991) 745–772.
- [48] V. Duclaux, [Pulmonary occlusions, eyelid entropion and aneurysm: A physical insight in physiology](#), Theses, Université de Provence - Aix-Marseille I (Nov. 2006).
URL <https://tel.archives-ouvertes.fr/tel-00130610>
- 920 [49] O. A. Arriagada, G. Massiera, M. Abkarian, Curling and rolling dynamics of naturally curved ribbons, Soft Matter 10 (2014) 3055–3065.
- [50] Z. Zhang, A Flexible New Technique for Camera Calibration., IEEE transactions on pattern analysis and machine intelligence 22 (11) (2000) 1330–1334.
- 925 [51] S. S. Antman, Kirchhoff’s problem for nonlinearly elastic rods, Quarterly of Applied Mathematics 32 (3) (1974) 221–240.
- [52] E. Reissner, On one-dimensional finite-strain beam theory: The plane problem, Zeitschrift für Angewandte Mathematik und Physik (ZAMP) 23 (1972) 795–804.
- 930 [53] G. R. Cowper, The Shear Coefficient in Timoshenko’s Beam Theory, Journal of Applied Mechanics 33 (2) (1966) 335–340.